

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 October 2002 (31.10.2002)


PCT

(10) International Publication Number  
**WO 02/086999 A1**

- (51) International Patent Classification<sup>7</sup>: **H01M 8/04** (72) Inventors: **RITTS, Rosalyn**; 53 Hun Road, Princeton, NJ 08540 (US). **SUN, Hoi-Cheong, Steve**; 1504 Blossim Circle, Dayton, NJ 08810 (US). **WHIPPLE, Richard**; 91 First Avenue, Raritan, NJ 08869 (US). **LIPP, Steven, Alan**; 9 Woodland Court, West Windsor, NJ 08550 (US). **KLATSKIN, Susan**; 6 Rickard Court, Lawrenceville, NJ 08648 (US). **IPPOLITO, Mary, Louise**; 19 Hopatcong Drive, Lawrenceville, NJ 08648 (US). **KAGANOWICZ, Grzegorz**; 292 Griggstown Road, Belle Mead, NJ 08502 (US). **LIBREATORE, Michael, James**; 208B Bakers Basin Road, Lawrenceville, NJ 08648 (US). **TIAN, Yongchi**; 3 Heath Court, Princeton, NJ 08540 (US). **COYLE, Peter, James**; 4 Pansy Court, Newtown, PA 18940 (US).
- (21) International Application Number: PCT/US02/11719
- (22) International Filing Date: 15 April 2002 (15.04.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
- |            |                               |    |
|------------|-------------------------------|----|
| 60/283,823 | 13 April 2001 (13.04.2001)    | US |
| 60/283,717 | 13 April 2001 (13.04.2001)    | US |
| 60/283,719 | 13 April 2001 (13.04.2001)    | US |
| 60/283,786 | 13 April 2001 (13.04.2001)    | US |
| 60/339,117 | 11 December 2001 (11.12.2001) | US |
| 60/357,481 | 15 February 2002 (15.02.2002) | US |
| 60/357,367 | 15 February 2002 (15.02.2002) | US |
- (74) Agent: **LERNER, DAVID, LITTENBERG, KRUMHOLZ & MENTLIK, LLP**; 600 South Avenue West, Westfield, New Jersey 07090 (US).
- (71) Applicant: **POWERZYME, INC [US/US]**; 11 Deer Park Drive, Suite 202, Monmouth Junction, New Jersey 08852 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

[Continued on next page]

(54) Title: ENZYMATIC FUEL CELL

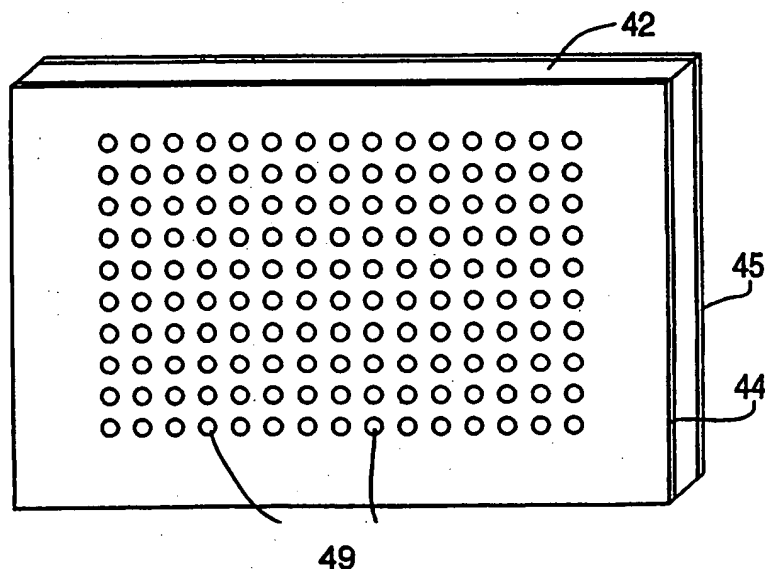

(57) Abstract: In one embodiment, provided is a fuel cell with an anode compartment and a cathode compartment comprising: in the anode compartment, an anode electrode and one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound comprising carbon, oxygen and hydrogen (optionally consisting of carbon, oxygen and hydrogen) to electron carrier(s), and wherein or further comprising one of the following: (i) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to the anode electrode, (ii) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to the anode electrode, wherein the anode compartment further comprises the

electron transfer mediator(s), (iii) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to a redox enzyme, the redox enzyme is selected to be effective to deliver electrons to second electron carrier(s), the second electron carrier(s) selected to be effective to deliver electrons to the anode electrode, wherein the anode compartment further comprises the redox enzyme, second electron carrier(s) and electron transfer mediator(s); in the cathode compartment, a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment.

WO 02/086999 A1

BEST AVAILABLE COPY



GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## ENZYMATIC FUEL CELL

The present invention relates to fuel cells, including re-chargeable fuel cells, for use in powering electrical devices.

Fuel cells are useful for the direct conversion of chemical energy into electrical energy. Fuel cells are typically made up of two chambers separated by two porous electrodes and an intervening electrolyte. A fuel chamber serves to introduce a fuel, typically hydrogen gas, which can be generated *in situ* by "reforming" hydrocarbons such as methane with steam, so that the hydrogen contacts H<sub>2</sub>O at the first electrode, where, when a circuit is formed between the electrodes, a reaction producing electrons and hydronium (H<sub>3</sub>O<sup>+</sup>) ions is catalyzed.



The electrolyte acts to convey hydrogen ions from the first electrode to the second electrode. The second electrode provides an interface with a recipient molecule, typically oxygen, found in the second chamber. The recipient molecule receives the electrons conveyed by the circuit.



The electrolyte element of the fuel cell can be, for example, a conductive polymer material such as a hydrated polymer containing sulfonic acid groups on perfluoroethylene side chains on a perfluoroethylene backbone such as Nafion<sup>TM</sup> polymer (du Pont de Nemours, Wilmington, DE) or like polymers such as those available from Dow Chemical Co. (Midland, MI). Other electrolytes include alkaline solutions (such as 35 wt %, 50 wt % or 85 wt % KOH), acid solutions (such as concentrated phosphoric acid), molten electrolytes (such as molten metal carbonate), and solid electrolytes (such as solid oxides such as yttria (Y<sub>2</sub>O<sub>3</sub>)-stabilized zirconia (ZrO<sub>2</sub>)). Liquid electrolytes are often retained in a porous matrix. Such fuel cells are described, for example, in "Fuel Cells," *Kirk-Othmer Encyclopedia of Chemical Technology*, Fourth Edition, Vol. 11, pp. 1098-1121.

The shortcomings of traditional fuel cell technology include short operational lifetimes due to catalyst poisoning from contaminants, high initial costs, and the practical

restrictions on devices that operate at relatively high to extremely high temperatures, such as 80°C to 1000°C..

In one aspect, the present invention provides a fuel cell technology that employs molecules used in biological processes to create fuel cells that can operate at moderate  
5 temperatures and without the presence of harsh chemicals maintained at high temperatures, which can lead to corrosion of the cell components. While the fuels used in the fuel cells of the invention are more complex, they are readily available and suitably priced for a number of applications, such as power supplies for mobile  
10 computing, digital imagers, portable electronic games, audio devices or telephone devices. It is anticipated that fuel cells of the invention can be configured such that a 300 cc cell has a capacity comparable to or more than that of a comparably sized battery for a laptop computer. Thus, it is believed that the fuel cells of the invention can be used to increase capacity, and/or decrease size and weight. Moreover, the compact, inert energy sources of the invention can be used to provide microscale power for short  
15 duration electrical output. Since the materials retained within the fuel cells are non-corrosive and typically not otherwise hazardous, it is practical to recharge the fuel cells with fuel, with the recharging done by the consumer or through a service such as a mail order service.

Moreover, in certain aspects, the invention provides fuel cells that use active  
20 transport of protons to increase sustainable efficiency.

#### **Summary of the Invention**

In one embodiment, provided is a fuel cell with an anode compartment and a cathode compartment comprising: in the anode compartment, an anode electrode and one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound  
25 comprising carbon, oxygen and hydrogen (optionally consisting of carbon, oxygen and hydrogen) to electron carrier(s), and wherein or further comprising one of the following:

(i) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to the anode electrode,

(ii) the electron carrier(s) are selected to operate with the dehydrogenase  
30 enzymes and to be effective to deliver electrons to electron transfer mediator(s) selected to be effective to deliver electrons to the anode electrode, wherein the anode compartment further comprises the electron transfer mediator(s),

(iii) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to a redox enzyme, the redox enzyme is selected to be effective to deliver electrons to second electron carrier(s), the second electron carrier(s) selected to be effective to deliver  
5 electrons to electron transfer mediator(s) selected to be effective to deliver the electrons to the anode electrode, wherein the anode compartment further comprises the redox enzyme, second electron carrier(s) and electron transfer mediator(s);

in the cathode compartment, a cathode electrode which, when a conductive pathway to  
10 the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment.

In another embodiment, provided is a method of producing electrical power  
15 comprising: in an anode compartment, enzymatically reducing electron carrier(s) with electrons from a C1 compound, the electron carrier(s) selected to operate with the dehydrogenase enzymes; directly transferring the electrons from the electron carrier(s) to an anode electrode; transferring electrical current via an electrical conduit under an electrical load to a cathode electrode; and transferring the electrons from the cathode  
20 electrode to an electron acceptor composition. Note that reference to "the" electrons refers to electrons available due to the previously recited electrons.

In yet another embodiment, provided is a method of producing electrical power comprising: in an anode compartment, enzymatically reducing electron carrier(s) with electrons from a C1 compound, the electron carrier(s) selected to operate with the  
25 dehydrogenase enzymes; directly transferring the electrons from the electron carrier(s) to the electron transfer mediator(s); transferring the electrons from the electron transfer mediator(s) to the anode electrode; transferring electrical current via an electrical conduit under an electrical load to a cathode electrode; and transferring the electrons from the cathode electrode to an electron acceptor composition.

30 In yet another embodiment, provided is a method of producing electrical power comprising: in an anode compartment, enzymatically reducing electron carrier(s) with electrons from a C1 compound, the electron carrier(s) selected to operate with the dehydrogenase enzymes; enzymatically transferring the electrons from the electron

carrier(s) to second electron carrier(s); directly transferring the electrons from the second electron carrier(s) to the electron transfer mediator(s); transferring electrons from the electron transfer mediator(s) to the anode electrode; transferring electrical current via an electrical conduit under an electrical load to a cathode electrode; and transferring  
5 electrons from the cathode electrode to an electron acceptor composition.

In yet another embodiment, provided is a fuel cell with an anode compartment and a cathode compartment comprising: in the anode compartment, an anode electrode and electron carrier(s); in the anode compartment, one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound to an electron carrier; in the cathode  
10 compartment, a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and a barrier separating the anode compartment from the cathode compartment but comprising a proton pumping polypeptide effective to transport protons from the anode compartment to the cathode  
15 compartment.

In yet another embodiment, provided is a method of producing electrical power comprising: in an anode compartment, enzymatically reducing electron carrier(s) with electrons from a C1 compound, the electron carrier(s) selected to operate with the dehydrogenase enzymes; enzymatically transferring the electrons from the electron  
20 carrier(s) to the redox enzyme; transferring the electrons from the redox enzyme to electron transfer mediator(s); transferring the electrons from the electron transfer mediator(s) to the anode electrode; transferring electrical current via an electrical conduit under an electrical load to a cathode electrode; and transferring the electrons from the cathode electrode to an electron acceptor composition.

Also provided is a method of forming a biocompatible membrane that incorporates a polypeptide associated with the biocompatible membrane comprising: contacting an aperture with a mixture of polypeptide, membrane-forming amphiphile and an amount of solvent miscible with a water and biomembrane phase effective to decrease viscosity sufficiently to facilitate biocompatible membrane formation; and removing the  
25 solvent by evaporation, thereby filling the aperture. Further provided is a biocompatible membrane comprising a membrane-like barrier formed of block copolymer that comprises cross-linked polymer formed across an aperture with beveled edges. In one embodiment, the biocompatible membrane incorporates a membrane-associated  
30

polypeptide. Still further provided is a method of preserving the function of a polypeptide in the presence of non-aqueous solvents comprising: forming a solution of block copolymers in a solvent comprising at least one non-aqueous solvent, and subsequently adding polypeptide to the solution.

- 5 In yet another embodiment, provided is a fuel cell with an anode compartment and a cathode compartment comprising: in the anode compartment, an anode electrode and one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound to an electron carrier, the anode compartment further comprising a liquid for supporting the dehydrogenase enzymes and adapted to maintain during operation of the
- 10 fuel cell a pH of 8.0 or higher; in the cathode compartment, hydrogen peroxide and a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment, the anode adapted to maintain during operation of the fuel cell a pH of 5.0 or lower; and a barrier separating the anode compartment from the cathode but effective
- 15 to convey protons from the anode compartment to the cathode compartment.

- Also provided is a fuel cell system comprising (1) a fuel cell with an anode compartment and a cathode compartment adapted to operate with a least one liquid consumable comprising (i) a liquid fuel composition or (ii) liquid electron acceptor composition, and: (2) one or both of (a) a fuel reservoir comprising liquid fuel
- 20 composition separated from the anode compartment by a porous membrane that is selected to not be wetted by either the liquid fuel composition or a solvent/solution with which the anode chamber is adapted to operate or (b) a liquid fuel composition reservoir separated from the cathode compartment by a porous membrane that is selected to not be wetted by either the liquid fuel composition or a composition with which the cathode
- 25 chamber is adapted to operate.

Further provided is a fuel cell system comprising a fuel cell with an anode compartment and a cathode compartment and using one or both of (a) a liquid fuel composition or (b) a liquid electron acceptor composition, the fuel cell comprising:

- 30 in the anode compartment, an anode electrode adapted to operate with a fuel;

in the cathode compartment, a cathode electrode which, when a conductive pathway to the anode electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment;

and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment; and

one or both of (a) a fuel reservoir comprising a liquid fuel composition separated from the anode compartment by a porous membrane that is selected to not be wetted by either the liquid fuel composition or a solvent/solution with which the anode chamber is adapted to operate or (b) a liquid electron acceptor composition reservoir separated from the anode compartment by a porous membrane that is selected to not be wetted by either the liquid electron acceptor composition of the reservoir or a composition with which the cathode chamber is adapted to operate.

Further provided is a method of operating a fuel cell comprising: consuming (i) a fuel molecule or (ii) an electron acceptor molecule during operation of the fuel cell; and transporting (i) fuel molecule or (ii) electron acceptor molecule via the vapor phase to a chamber in which the respective fuel molecule or electron acceptor molecule is consumed.

Also provided is a fuel cell system comprising a fuel cell with an anode compartment and a cathode compartment, the fuel cell comprising:

in the anode compartment, an anode electrode, wherein the anode compartment is adapted to generate CO<sub>2</sub>;

in the cathode compartment, a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment; and a CO<sub>2</sub> permeable membrane or porous material adapted to allow CO<sub>2</sub> to exit the anode compartment.

Still further provided is a method of operating a fuel cell comprising: consuming in an anode compartment a fuel to generate CO<sub>2</sub> during operation of the fuel cell; removing CO<sub>2</sub> derived from the C1 compound from the anode compartment; and replacing liquid volume in the anode compartment consumed by operation of the fuel cell and CO<sub>2</sub> removal with replacement fuel.



Also provided is a device for metering a reactant concentrate comprising: a first chamber adapted for containing reactant concentrate; a second chamber adapted for receiving reactant concentrate from the first chamber; and a membrane separating the first and second chambers comprising pores traversing from a first chamber side of the membrane to a second chamber side of the membrane, and internal conduit in the membrane effective to deliver gas to the pores.

Further provided is a fuel cell adapted for use with an anode composition, the fuel cell comprising: an anode/cathode barrier that selectively transmits protons; an anode chamber comprising a grid of porous material selected to not be wetted by the anode composition and to transmit CO<sub>2</sub>; and a manifold connected to the grid to collect CO<sub>2</sub> transmitted through the grid.

Still further provided is a fuel cell with an anode compartment and a cathode compartment comprising: in the anode compartment, an anode electrode and, integrated into biocompatible membrane tethered to the anode electrode, a redox enzyme that can receive electrons from an electron carrier; in the cathode compartment, a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment.

Also provided is a fuel cell with an anode compartment and a cathode compartment comprising: in the anode compartment, an anode electrode and, associated with or adjacent to the anode electrode, a redox enzyme incorporated into a synthetic membrane comprising a block copolymer, wherein the redox enzyme can receive electrons from an electron carrier; in the cathode compartment, a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment.

Additionally provided is a fuel cell with an anode compartment, a cathode compartment and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment, comprising in the anode compartment, one or more anode electrodes and, one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound

to electron carrier(s), wherein one or more of the said enzyme(s) are covalently linked to surface(s) within the anode compartment. Also provided is a fuel cell with an anode compartment, a cathode compartment and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment, comprising in the anode compartment, one or more anode electrodes and, one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound to electron carrier(s), wherein one or more of the said enzyme(s) are covalently linked to a polymer matrix within the anode compartment. When the dehydrogenase enzymes are covalently linked within the anode compartment, useful surfaces include: the anode/cathode barrier, one or more of the anode electrodes, beads or gels in the anode compartment, anode walls and fuel feeding membrane(s).

Still further provided is a fuel cell with an anode compartment and a cathode compartment adapted to operate with a hydrogen peroxide as electron acceptor molecule, the fuel cell comprising: a first barrier separating the anode compartment and the cathode compartment, but effective to transport protons from the anode compartment to the cathode compartment; and a second barrier separating the anode compartment and the cathode compartment, which is more proximate to the cathode compartment than the first, wherein the second barrier is a biocompatible membrane or a proton-conductive polymeric membrane, the second barrier fitted to limit the diffusion of hydrogen peroxide to the first barrier.

### **Brief Description of the Drawings**

Figures 1 and 2 schematically illustrate fuel cells.

Figure 3A illustrates a proton-conductive divider between an anode and a cathode chamber.

Figure 3B shows an expanded, schematic view of a proton conductive divider, while Figure 3C shows such a divider in the context of a cell housing. The schematic of Fig. 3D is more realistic as to the structure of the biocompatible membrane, while that of Fig. 3E shows another placement of the electrodes.

Figure 4 illustrates the use of reservoirs in conjunction with the anode or cathode chamber.

Figures 5A and 5B show the operation of vapor phase gating of fuel or electron acceptor. Figure 6 illustrates wicking systems for delivering fuel or electron acceptor.

Figures 7A and 7B illustrate the use of anchored biocompatible membrane.

Figures 8A-8D and 9 further illustrate devices for delivering fuel or electron acceptor.

Figure 10 illustrates another device for delivering fuel.

5        Figures 11A-11D illustrate a device for regulating fuel (or electron acceptor molecule composition) distribution across a porous membrane to the anode (or cathode) compartment.

Figures 12A-12B show a device for delivering fuel concentrate, and removing CO<sub>2</sub>.

10       Figures 13A-13E show a device for withdrawing CO<sub>2</sub>.

Figures 14A to 14C show biocompatible membranes formed across an aperture with bevelled edges.


#### Detailed Description of the Invention

15       Figure 1 illustrates features of an exemplary fuel cell 10. The fuel cell 10 has a first (anode) chamber 1 containing an electron carrier, with the textured background fill of the first chamber 1 illustrating that the solution can be retained within a porous matrix (including a porous polymeric membrane). Second (intermediate) chamber or porous polymeric membrane 2 ("anode/cathode barrier") similarly contains an electrolyte  
20 (which can be the same material as found in the first chamber) in a space, which space can also be filled with a retaining matrix, intervening between porous first electrode 4 and porous second electrode 5. A face of second electrode 5 contacts the space of third (cathode) chamber 3, into which an electron acceptor molecule, such as oxygen or a peroxide, is introduced. First electrical contact 6 and second electrical contact 7 allow a  
25 circuit to be formed between the two electrodes.



The reaction, typically catalyzed by redox enzymes, that occurs at the first (anode) electrode can be exemplified with NADH as follows:



This reaction can be fed by the following reactions:




- 10 -




Total:



5 Thus, the feeder reactions and the electron-generating reaction sum as follows:



Total:



- 10 In some embodiments, redox enzymes can relay the electrons to electron transfer mediators that convey the electrons to the anode electrode. Thus, if an enzyme normally conveys the electrons to reduce a small molecule (such as in the reverse of reactions 4-6), this small molecule in some embodiments is bypassed. Fuels that can be used include, in addition to methanol and more direct methanol analogs, oxalic acid, methylformate, dimethyloxalate, and the like. Certain microbial enzyme systems can utilize compounds that incorporate nitrogen and phosphorous.


The feeder enzymes that can be used to generate a reduced electron carrier (such as NADH as illustrated above) from an organic molecule such as methanol can start with a form of alcohol dehydrogenase (ADH). Suitable ADH enzymes are described for example in Ammendola et al., "Thermostable NAD(+)-dependent alcohol dehydrogenase from *Sulfolobus solfataricus*: gene and protein sequence determination and relationship to other alcohol dehydrogenases," *Biochemistry* 31: 12514-23, 1992; Cannio et al., "Cloning and overexpression in *Escherichia coli* of the genes encoding NAD-dependent alcohol dehydrogenase from two *Sulfolobus* species," *J. Bacteriol.* 178: 301-5, 1996; Saliola et al., "Two genes encoding putative mitochondrial alcohol dehydrogenases are present in the yeast *Kluyveromyces lactis*," *Yeast* 7: 391-400, 1991; and Young et al.,

- "Isolation and DNA sequence of ADH3, a nuclear gene encoding the mitochondrial isozyme of alcohol dehydrogenase in *Saccharomyces cerevisiae*," Mol. Cell Biol. 5: 3024-34, 1985. If the resulting formaldehyde is oxidized, an aldehyde dehydrogenase (ALD) is used. Suitable ALD enzymes are described for example in Peng et al., "cDNA cloning and characterization of a rice aldehyde dehydrogenase induced by incompatible blast fungus," GeneBank Accession AF323586; Sakano et al., "Arabidopsis thaliana [thale cress] aldehyde dehydrogenase (NAD<sup>+</sup>)-like protein" GeneBank Accession AF327426. If the further resulting formic acid is oxidized, a formate dehydrogenase (FDH) is used. Suitable FDH enzymes are described for example in Colas des Francs-
- 10 Small, et al., "Identification of a major soluble protein in mitochondria from nonphotosynthetic tissues as NAD-dependent formate dehydrogenase [from potato]," Plant Physiol. 102(4): 1171-1177, 1993; Hourton-Cabassa, "Evidence for multiple copies of formate dehydrogenase genes in plants: isolation of three potato fdh genes, fdh1, fdh2, and fdh3," Plant Physiol. 117: 719-719, 1998.
- 15 For reasons discussed below, it can be useful to use feeder enzymes that are adapted to use or otherwise can accommodate quinone-based electron acceptors. Such enzymes are, for example, described in: Pommier et al., A second phenazine methosulphate-linked formate dehydrogenase isoenzyme in *Escherichia coli*, Biochim Biophys Acta. 1107(2):305-13, 1992 ("The diversity of reactions involving formate
- 20 dehydrogenases is apparent in the structures of electron acceptors which include pyridine nucleotides, 5-deazaflavin, quinones, and ferredoxin"); Ferry, Formate dehydrogenase, FEMS Microbiol Rev. 7(3-4):377-82, 1990 (formaldehyde dehydrogenase with quinone activity); Klein et al., A novel dye-linked formaldehyde dehydrogenase with some properties indicating the presence of a protein-bound redox-active quinone cofactor,
- 25 Biochem J. 301 ( Pt 1):289-95, 1994 (representative of a number of articles on dehydrogenases with bound quinone cofactors); Goodwin et al., The biochemistry, physiology and genetics of PQQ and PQQ-containing enzymes, Adv. Microb. Physiol. 40:1-80, 1998 (on alcohol dehydrogenases that utilize quinones); Maskos et al., Mechanism of p-nitrosophenol reduction catalyzed by horse liver and human pi-alcohol
- 30 dehydrogenase (ADH), J. Biol. Chem. 269(50):31579-84, 1994 (example of mediator-catalyzed transfer of electrons from NADH to an electrode following NADH reduction by an enzyme); and Pandey, Tetracyanoquinodimethane-mediated flow injection analysis

electrochemical sensor for NADH coupled with dehydrogenase enzymes, Anal. Biochem. 221(2):392-6, 1994.


The above described feeder enzymes for generating the reduced form of electron carriers from methanol are particularly desirable, since the energy density of methanol as fully consumed to carbon dioxide is high, and the pathway to full consumption involves only a few enzymes. Of course, it will be recognized that other feeder organic molecules other than methanol can be used if these feeder molecules are precursors to oxidized C1 molecules, with the feeder enzymes adjusted as needed to accommodate this fuel. Precursors include for example trioxane, polymers of formaldehyde, methylether, methylformate and formate anhydride. The feeder reactions may or may not proceed to the endpoint of generating carbon dioxide. Or, the feeder reaction may start with a more oxidized fuel, such as formaldehyde or formic acid (or a salt thereof).

The corresponding reaction at the second (cathode) electrode can be any reaction that consumes the produced electrons with a useful redox potential. Using oxygen, for example, the reaction can be:



Using reaction 2, the bathing solution can be buffered to account for the consumption of hydrogen ions, hydrogen ion donating compounds can be supplied during operation of the fuel cell, or more preferably, the barrier between the anode and cathode compartments is sufficiently effective to deliver the neutralizing hydrogen ions.

In one embodiment, the corresponding reaction at the second (cathode) electrode is:



The cathode reactions result in a net production of water, which, if significant, can be dealt with by, for example, providing for space for overflow liquid, or providing for vapor-phase exhaust as described below. A number of electron acceptor molecules are often solids at operating temperatures or solutes in a carrier liquid, in which case the third chamber 3 should be adapted to carry such non-gaseous material. Where, as possibly with hydrogen peroxide, the electron acceptor molecule can damage the enzymes of the anode chamber, the second chamber 2 can have a segment, as illustrated as item 8 in fuel cell 10' of Figure 2, containing a scavenger for such electron acceptor

molecule. Such a scavenger can be, for example, the enzyme catalase ( $2\text{H}_2\text{O}_2 \rightarrow 2\text{H}_2\text{O} + \text{O}_2$ ), especially where conditions at the anode electrode are not effective to catalyze electron transfer to  $\text{O}_2$ . Alternatively, the scavenger can be any noble metal, such as gold or platinum. Such a scavenger, where an enzyme, can be covalently linked to a solid support material. Alternatively, the barrier between the anode chamber and the cathode chamber has at most limited permeability to hydrogen peroxide.

Solid oxidants, such as potassium perchlorite ( $\text{KClO}_4$ ) or potassium permanganate ( $\text{KMnO}_4$ ), can be used as the electron acceptor.

In one embodiment, the electrodes comprise metallizations on one or both sides of a non-conductive (for electrons) substrate such a polymeric membrane or a material that selectively transports protons. For example, in **Figure 3A** the metallization on a first side of dielectric substrate 42 is the anode electrode 44, while the metallization on the second side is the cathode electrode 45. Perforations 49 function as the conduit between the anode and cathode of the fuel cell, as discussed further below. The illustration of **Figure 3A**, it will be recognized, is illustrative of the relative geometry of this embodiment. The thickness of dielectric substrate 42 is, for example, from 15 micrometer ( $\mu\text{m}$ ) to 100 micrometer, or from 15 to 50 micrometer, or, preferably, from 15 micrometer to 30 micrometer. The width of the perforations is, for example, from 10 micrometer to 1,000 micrometer, or 20 to 200 micrometer, or, preferably, 60 to 140 micrometer. Preferably, perforations comprise in excess of 30% of the area of any area of the dielectric substrate involved in transport between the chambers, such as from 50 to 75% of the area. In certain preferred embodiments, the dielectric substrate is glass or an polymer (such as polyvinyl acetate, polydimethylsiloxane (PDMS), Kapton® (polyimide film, Dupont de Nemours, Wilmington, DE), a perfluorinated polymer (such as Teflon, from DuPont de Nemours, Willmington, DE), polyvinylidene fluoride (PVDF, e.g., a semi-crystalline polymer containing approximately 59% fluorine sold as Kynar™ by Atofina, Philadelphia, PA), PEEK (defined below), polyester, UHMWPE (described below), polypropylene or polysulfone), soda lime glass or borosilicate glass, or any of the foregoing coated with metal. The metal can be used to anchor biocompatible membrane (such as a monolayer or bilayer of amphiphilic molecules). The metal coated can be receded from any junctions in which they provide too likely a pathway for a short between the anode and cathode compartments.

Fig. 3B illustrates the electrodes framed on a perforated substrate in more detail. The perforations 49 together with the dielectric substrate 42 (which here defines the anode/cathode barrier) can provide a support for monolayers or bilayers of lipid or other suitable amphipathic molecules (i.e., biocompatible membranes) spanning the

5 perforations. Such biocompatible membranes can incorporate at least a first enzyme or enzyme complex (hereafter "first enzyme") 62 effective preferably (i) to transport protons from the fuel (anode) side 41 to the product (cathode) side 43 of the fuel cell 50 and (ii) to oxidize the reduced form of an electron carrier, or the first enzyme can function to transport protons without the reductive activity. The first enzyme 62 can be

10 immobilized in the biocompatible membrane with the appropriate orientation to allow access of the catalytic site for the oxidative reaction to the fuel side and asymmetric pumping of protons. However, if the first enzyme is not asymmetrically oriented, the reverse oriented enzyme is not detrimental for a variety of reasons depending on the context. First, the charge imbalance created by the fuel cell on the anode side drives

15 proton transport to the cathode side even against a proton concentration gradient. In situations where the pumping is tied to the use of fuel (reduced electron carrier), the reverse pumping has no fuel since as the electron carrier is substantially isolated on the fuel side 41. (By "substantially isolated" those of ordinary skill will recognize sufficiently isolated to allow the fuel cell to operate.) The biocompatible membrane can

20 incorporate more than one type of enzyme, as indicated with second enzyme 63 in the schematic.

As illustrated in Fig. 3E, the electrodes can be usefully placed at locations separated from the anode cathode barrier.

In operating the fuel cell of the invention, a number of modes apply:

- 25 1. The dehydrogenase enzymes act with bound or non-bound electron carrier(s) (cofactor) that are effective to directly transfer electrons to the anode electrode. Such cofactors are believed to include quinone-based cofactors such as are used in C1-metabolizing microbial enzymes.
- [Bound and non-bound electron carriers will be recognized by the those of
- 30 skill in the art as those that reside association with the enzyme during redox cycles, and those that exchange off the enzyme to complete redox cycles, respectively.]



2. The dehydrogenase enzymes act with bound or non-bound electron carrier(s) (cofactor) that are effective to directly transfer electrons to electron transfer mediator(s) that directly transfer the electrons to the anode electrode or directly to second electron transfer mediator(s) more effective to act on the anode electrode (either such electron transfer mediators deemed to be effective to deliver electrons to the anode electrode).
  3. The dehydrogenase enzymes act with non-bound electron carrier(s) (cofactor) that are then acted upon by a redox enzyme (which may or may not be part of a biocompatible membrane), which transfers the electrons to a second electron carrier(s). Such electron transfer mediator(s) directly transfer the electrons to the anode electrode or directly to second electron transfer mediator(s) more effective to act on the anode electrode.
  4. The dehydrogenase enzymes act with non-bound electron carrier(s) (cofactor) that are then acted upon by a redox enzyme (which may or may not be part of a biocompatible membrane), which transfers the electrons to electron transfer mediator(s). Such electron transfer mediator(s) directly transfer the electrons to the anode electrode or directly to second electron transfer mediator(s) more effective to act on the anode electrode.
- As should be apparent, the electron carriers or electron transfer mediators effective to directly transfer electrons to the anode electrode can be determined experimentally by directly providing the reduced form (without generation from fuel). Similarly, compounds that spontaneously transfer electrons between one another can be determined with appropriate chemical analysis after contacting the reduced form of a first compound with the oxidized form of a second compound.

Examples of useful redox enzymes providing one or both of the oxidation/reduction and proton pumping functions include, for example, NADH dehydrogenase ("complex I") (e.g., from *E. coli*. Tran et al., "Requirement for the proton pumping NADH dehydrogenase I of *Escherichia coli* in respiration of NADH to fumarate and its bioenergetic implications," Eur. J. Biochem. 244: 155, 1997), NADPH transhydrogenase, proton ATPase, and cytochrome oxidase and its various forms, and the like. Methods of isolating such an NADH dehydrogenase enzyme are described in detail, for example, in Braun et al., Biochemistry 37: 1861-1867, 1998; and Bergsma et

al., "Purification and characterization of NADH dehydrogenase from *Bacillus subtilis*,"  
Eur. J. Biochem. 128: 151-157, 1982. As described by Spehr et al., Biochemistry  
38:16261-16267, 1999, the complex I NADH dehydrogenase (or, NADH:ubiquinone  
oxidoreductase), which is expressed from a operon, can be overexpressed in *E. coli* by  
5 substituting a T7 promoter in the operon to provide useful quantities for use in the  
invention. Complex I can be isolated from over-expressing *E. coli* by the method  
described by Spehr et al. using solubilization with dodecyl maltoside.

Complex I can be handled such that NADH dehydrogenase activity is eliminated  
or greatly reduced. As described in Böttcher et al., "A Novel, Enzymatically Active  
10 Conformation of the *Escherichia coli* NADH:Ubiquinone Oxidoreductase (Complex I),"  
web published as accepted for publication at [www.jbc.org](http://www.jbc.org), 2002 (Manuscript  
M112357200), in high salt or high pH solution Complex I changes conformation such  
that proton transport is uncoupled from NADH dehydrogenase activity, creating DH<sup>-</sup>  
form. Applicants have used these conditions and combinations of these conditions to  
15 show that the fuel cell of the invention operates without NADH dehydrogenase activity  
in the anode/cathode barrier. Such conditions include salt concentrations of 200 mM to  
2M, and pH of 8.0 or above. Transporter activity is believed to function against a  
countering [H<sup>+</sup>] gradient, due to the charge imbalance between the anode and cathode  
sides. Proton transporter activity of the DH<sup>-</sup> form has been confirmed from the  
20 maintenance of current generation in fuel cells in which biocompatible membranes gated  
by this form provided the only avenue to relieve charge imbalance. (Note that with  
complex I reverse transport of protons has been further controlled against by using  
conditions on the cathode side that maintain the NADH dehydrogenase coupling of any  
inversely oriented complex I —thereby blocking reverse transport due to lack of NADH  
25 substrate.)

It will be recognized that the source of any enzyme used in the invention can be a  
thermophilic organism providing a more temperature stabile enzyme. For example,  
complex I can be isolated from *Aquifex aeolicus* in a form that operates optimally at  
90 °C, as described in Scheide et al., FEBS Letters 512: 80-84, 2002 (describing a  
30 preliminary isolation using the type of detergent extraction used elsewhere for complex  
I).

Additionally, it is contemplated that genetically modified enzymes can be used.  
One commonly applied technique for genetically modifying an enzyme is to use

recombinant tools (e.g., exonucleases) to delete N-terminal, C-terminal or internal sequence. These deletion products are created and tested systematically using ordinary experimentation. As is often the case, significant portions of the gene product can be found to have little effect on the commercial function of interest. It is anticipated that more focused deletions and substitutions can increase stability providing enzymes that can be used in the invention.

The biocompatible membrane can be formed across the perforations 49 and enzyme incorporated therein by, for example, the methods described in detail in Niki et al., US Patent 4,541,908 (annealing cytochrome C to an electrode) and Persson et al., J. Electroanalytical Chem. 292: 115, 1990. Such methods can comprise the steps of: making an appropriate solution of lipid or other amphipathic compounds and enzyme, where the enzyme may be supplied to the mixture in a solution stabilized with a detergent; and, once an appropriate solution of lipid or other amphiphiles and enzyme is made, the perforated dielectric substrate is dipped into the solution to form the enzyme-containing biocompatible membranes. Sonication or detergent dilution may be required to facilitate enzyme incorporation into a biocompatible membrane. *See, for example*, Singer, Biochemical Pharmacology 31: 527-534, 1982; Madden, "Current concepts in membrane protein reconstitution," Chem. Phys. Lipids 40: 207-222, 1986; Montal et al., "Functional reassembly of membrane proteins in planar lipid bilayers," Quart. Rev. Biophys. 14: 1-79, 1981; Helenius et al., "Asymmetric and symmetric membrane reconstitution by detergent elimination," Eur. J. Biochem. 116: 27-31, 1981; Volumes on biomembranes (e.g., Fleischer and Packer (eds.)), in Methods in Enzymology series, Academic Press.


Existing methods of forming biocompatible membranes tend to share a commonality. A thin partition made (preferably but not necessarily) of a hydrophobic material such as Teflon with a small aperture has a small amount of lipid (or other amphiphile) introduced. The lipid-coated aperture is immersed in a dilute electrolyte solution upon which the lipid droplet will thin and spontaneously self-orient into a planar bilayer spanning the aperture. Biocompatible membranes of substantial area have been prepared using this general technique. Two common methods for formation of the biocompatible membranes themselves are the Langmuir-Blodgett technique and the injection technique.

The Langmuir-Blodgett technique involves the use of a Langmuir-Blodgett trough with a partition, such as a Teflon<sup>TM</sup> polymer partition at the center. The trough is filled with aqueous solution. The aperture of the polymer partition is placed above the water level. The lipid or other amphipathic component solution (BLM solution) is spread over the surface and the polymer partition is lowered slowly into the aqueous solution forming a biocompatible membrane ("BLM") over the aperture. The injection method is similar except the polymer partition is kept fixed. In this method the aqueous phase is filled to just under the aperture, the BLM solution is introduced over the surface and then the liquid level is raised over the partition by injecting additional electrolyte solution from underneath, thus forming the BLM over the aperture.

Another method for forming biocompatible membranes is using the technique of self-assembly. This is a variation from the above two described techniques and was in fact the first technique to be successfully employed to fabricate synthetic lipid membranes. The technique involves the preparation of a lipid forming solution much the same as those described above. A drop of the solution is introduced into a perforated hydrophobic substrate. The substrate is then immersed in a dilute aqueous electrolyte solution whereupon the droplet will spontaneously thin and self assemble such that a symmetric layer forms with the polar heads of the lipid molecules (or other amphiphiles) oriented outward toward the aqueous phase and the nonpolar tails oriented inwards. The remaining material migrates to the perimeter of the layer where it forms a reservoir called the Plateau-Gibbs border.

Further, as described by Hui et al., US Patent 5,919,576, hybrid biocompatible membranes can be formed on immobilized lipid (other amphiphiles) by incubating the immobilized lipid with isolated membranes. Enzymatic activities from the isolated membrane source are retained in the hybrid biomembranes.

Biocompatible membranes can also be formed from appropriate block copolymers, such as A-B, A-B-A or A-B-C block copolymers. One suitable block copolymer is described in a series of articles by Corinne Nardin, Wolfgang Meier and others. Angew Chem Int. Ed. 39: 4599-4602, 2000; Langmuir 16: 1035-1041, 2000; Langmuir 16: 7708-7712, 2000. The functionalized poly(2-methyloxazoline)-*block*-poly(dimethylsiloxane)-*block*-poly(2-methyloxazoline) triblock copolymer described is as follows

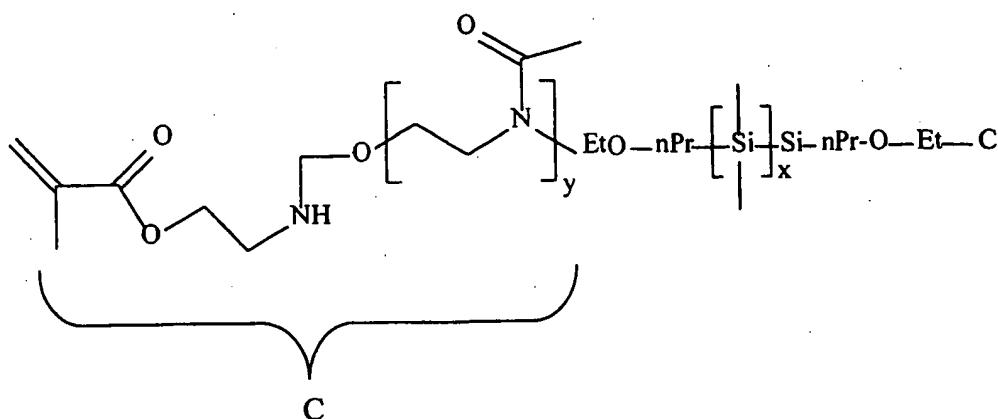

In the above chemical formula, the average x value is 68, and the average y value is 15. The "C" recited does not necessarily equate with the "C" designation of an A-B-C block copolymer. Embodiments of the invention include such A-B, A-B-A or A-B-C polymers in which the average molecular weight of A (or C) is, for example, 1,000 to 3,000 daltons, and the average molecular weight of B is 2,000 to 10,000 daltons. More generally, however, the hydrophobic/hydrophilic balance is selected to (i) provide a solid at the anticipated operating temperature and (ii) promote the formation of biomembrane-like structures over micelles. For this latter function, it is anticipated that generally the hydrophobic component mass shall exceed the hydrophilic component mass. This polymer has been shown to provide relatively large membranes that can incorporate functional three-subunit pore-forming proteins. The methacrylate moieties at the ends of the polymer molecules allow for free-radical mediated crosslinking after incorporating protein to add greater mechanical stability. Moreover, non-ionic biocompatible membranes such as these have greater stability to higher voltage differences across the anode/cathode barrier. Note that despite often being two to three times (or more) thicker than conventional biomembranes, biocompatible membranes formed with these polymers have been found to support the activity of such membrane-associated polypeptides as complex I.

One method of forming a biocompatible membrane, which is preferred for use with block copolymer-based membrane, is as follows:

1. Form a solution of block copolymer in solvent (BC solution). The solution can be a mixture of two or more block copolymers. The solution preferably contains 1 to 90% w/v copolymer, more preferably 2 to 20%, or yet more preferably 5 to 10%, such as 7%.

2. Make proton pumping polypeptide (typically with solubilizing detergent) solution in the prepared BC solution, preferably by adding 0.5 to 5.0 mg/mL of the proton pumping polypeptide (such as complex I), more preferably 1.0 to 4.0 mg/mL. (With amounts preferably selected so that polypeptide comprises up to 10% by weight of the biocompatible membrane after formation.)
3. Drop a small volume (e.g., 4 microliter) polypeptide/BC solution onto each aperture or each of a subset of apertures, and allow to dry, thereby removing the solvent.
4. Repeat step 3 as needed to cover all apertures.
- 10 5. Check each aperture under the microscope. Repair holes using BC solution and a micropipette-scaled pipetting device. It typically requires only a very small volume of BC solution to repair such holes. With experience, however, few if any repairs are needed.

The solvent is selected to be miscible with both the water component used in the process and the B component of the block copolymer. Appropriate solvents are believed to include methanol, ethanol, 2-propanol, 1-propanol, tetrahydrofuran, 1,4-dioxane, solvent mixtures that can include more apolar solvents such as dichloromethane so long as the mixture has the appropriate miscibility, and the like. (Solvent components that have any tendency to form protein-destructive contaminants such as peroxides can be appropriately purified and handled.) Solvent typically comprises 10% v/v or more of the applied polypeptide/BC solution, preferably 20% or more, and usefully 30% or more.

The above-described method of introducing polypeptide to a solution containing non-aqueous solvent(s) in the presence of block copolymers serves to stabilize the function of catalytic polypeptides. The non-aqueous components can comprise all of the solvent.

Where the biocompatible membrane incorporates cross-linking moieties, the following procedure can be used:

1. Prepare biocompatible membrane in a support that with form the cathode/anode barrier.
- 30 2. Assemble a cell with biocompatible membrane on anode/cathode barrier support, electrodes and buffers only.
3. Connect the two electrodes to a high load, such as approximately 150 kilo-Ohms.

4. Add hydrogen peroxide to cathode side, for example such that the concentration of the peroxide will be 1% by volume.
5. Let fuel cell stand under load for a period of time, for example 1 hour ( $\pm 10\%$ ).
6. Adjust pH of the cathode side to below pH 5 to stops the crosslinking.

- 5 Parameters can be adjusted depending on such conditions as the membrane material, the size of biocompatible membrane segments, the structure of the support, and the like.

In one embodiment, as shown in **Figures 14A to 14C**, the biocompatible membrane **61** contains cross-linking moieties and is formed across an aperture with beveled edges to the substrate **42**. The degree of beveling can be any degree that increases the stability of the biocompatible membrane. Where the cross-linked block copolymer is relatively less rigid, greater beveling can be used to increase stability, while a lessor amount of beveling can be appropriate for more rigid cross-linked block copolymer. As illustrated, numerous beveling shapes can contribute to increasing stability.

- 15 The mixtures of block copolymers can be mixtures of two or more of the following classes, where the separate components can be of the same class but with a different distribution of polymer blocks:

Polymer	Source
triblock copolymers E/EP/E, of poly(ethylene)(E) and poly(ethylenepropylene)(EP)	
Triblock copolyampholytes from 5-(N,N-dimethylamino)isoprene, styrene, and methacrylic acid	Bieringer et al., Eur. Phys. J.E. 5:5-12, 2001. Among such polymers are $Ai_{14}S_{63}A_{23}$ , $Ai_{31}S_{23}A_{46}$ , $Ai_{42}S_{23}A_{35}$ , $Ai_{56}S_{23}A_{21}$ , $Ai_{57}S_{11}A_{32}$

Polymer	Source
Styrene-ethylene/butylene-styrene triblock copolymer	(KRATON) G 1650, a 29% styrene, 8000 solution viscosity (25 wt-% polymer), 100% triblock styrene-ethylene/butylene-styrene (S-EB-S) block copolymer; (KRATON) G 1652, a 29% styrene, 1350 solution viscosity (25 wt-% polymer), 100% triblock S-EB-S block copolymer; (KRATON) G 1657, a 4200 solution viscosity (25 wt-% polymer), 35% diblock S-EB-S block copolymer; all available from the Shell Chemical Company. Such block copolymers include the styrene-ethylene/propylene (S-EP) types and are commercially available under the tradenames (KRATON) G 1726, a 28% styrene, 200 solution viscosity (25 wt-% polymer), 70% diblock S-EB-S block copolymer; (KRATON) G-1701X a 37% styrene, >50,000 solution viscosity, 100% diblock S-EP block copolymer; and (KRATON) G-1702X, a 28% styrene, >50,000 solution viscosity, 100% diblock S-EP block copolymer.
Siloxane triblock copolymer	PDMS-b-PCPMS-b-PDMSs (PDMS = polydimethylsiloxane, PCPMS = poly(3-cyanopropylmethylsiloxane) can be prepared through kinetically controlled polymerization of hexamethylcyclotrisiloxane initiated by lithium silanolate endcapped PCPMS macroinitiators. The macroinitiators can be prepared by equilibrating mixtures of 3-cyanopropylmethylcyclotrisiloxanes (DxCN) and dilithium diphenylsilanediolate (DLDPs). DxCNs can be synthesized by hydrolysis of 3-cyanopropylmethyldichlorosilane, followed by cyclization and equilibration of the resultant hydrolysates. DLDPs can be prepared by deprotonation of diphenylsilanediol with diphenylmethyllithium. Mixtures of DxCN and DLDPs can be equilibrated at 100°C within 5-10 hours. By controlling the DxCN-to-DLDPs ratio, macroinitiators of different molecular weights are obtained. The major cyclics in the macroinitiator equilibrate are tetramer ( $8.6 \pm 0.7$ wt%), pentamer ( $6.3 \pm 0.8$ wt%) and hexamer ( $2.1 \pm 0.5$ wt%). 2.5k-2.5k-2.5k, 4k-4k-4k, and 8k-8k-8k triblock copolymers have been characterized. These triblock copolymers are transparent, microphase separated and highly viscous liquids.
PEO-PDMS-PEO triblock copolymer	Formed from Polyethylene oxide (PEO) and polydimethyl siloxane (PDMS).



Polymer	Source
Functionalized poly(2-methyloxazoline)- <i>block</i> -poly(dimethylsiloxane)- <i>block</i> -poly(2-methyloxazoline) triblock copolymer	<u>Angew Chem Int. Ed.</u> 39: 4599-4602, 2000; <u>Langmuir</u> 16: 1035-1041, 2000. These A-B-Apolymers include versions in which the A components have MW of approximately 2 kd, and the B component of approximately 5 kd, and (b) the A components have MW of approximately 1 kd, and the B component of approximately 2 kd
Poly(d/l-lactide)("PLA")-PEG-PLA triblock copolymer	
Poly(styrene-b-butadiene-b-styrene) triblock copolymer	
Poly(ethylene oxide)/poly(propylene oxide) triblock copolymers	Such polymers included Pluronic F127, Pluronic P105, or Pluronic L44 from BASF (Performance Chemicals).
PDMS-PCPMS-PDMS (polydimethylsiloxane-polycyanopropylmethylsiloxane) triblock copolymer	A series of epoxy and vinyl endcapped polysiloxane triblock copolymers with systematically varied molecular weights can be synthesized via anionic polymerization using LiOH as an initiator.
polydiene-polystyrene-polydiene	Available as Protolyte A700 from DAIS-Analytic, Odessa, FL.
Azo-functional styrene-butadiene-HEMA triblock copolymer	
Amphiphilic triblock copolymer carrying polymerizable end groups	
Syndiotactic polymethylmethacrylate (sPMMA)-polybutadiene (PBD)- sPMMA triblock copolymer	
Tertiary amine methacrylate triblock	
Biodegradable PLGA-b-PEO-b-PLGA triblock copolymer	
Polyactide-b-polyisoprene-b-polyactide triblock copolymer	
Poly(isoprene-block-styrene-block-dimethylsiloxane) triblock copolymer	
Poly(ethylene oxide)-block-polystyrene-block-poly(ethylene oxide) triblock copolymer	
Poly(ethylene oxide)-poly(THF)-poly(ethylene oxide) triblock copolymer	
Ethylene oxide triblock	
Poly E-caprolactone	Birmingham Polymers, Birmingham, AL.
Poly(DL-lactide-co-glycolide)	Birmingham Polymers.
Poly(DL-lactide)	Birmingham Polymers.

Polymer	Source
Poly(L-lactide)	Birmingham Polymers.
Poly(glycolide)	Birmingham Polymers.
Poly(DL-lactide-co-caprolactone)	Birmingham Polymers.
Styrene-Isoprene-styrene triblock copolymer	Japan Synthetic Rubber Co., Tokyo, Japan; MW= 140kg/mol; Block ratio of PS/PI= 15/85.
PMMA-b-PIB-b-PMMA	Poly(methyl methacrylate) (PMMA) and polyisobutylene (PIB).
PLGA-PEO-PLGA triblock copolymer	Polymers of poly(DL-lactic acid-co-glycolic acid) (PLGA) and PEO.
Sulfonated styrene/ethylene-butylene/styrene (S-SEBS) triblock copolymer proton conducting membrane	
Poly(l-lactide)-block-poly(ethylene oxide)-block-poly(l-lactide) triblock copolymer	
Poly-ester-ester-ester triblock copolymer	
PLA/PEO/PLA triblock copolymer	The synthesis of the triblock copolymers can be prepared by ring-opening polymerization of DL-lactide or ε-caprolactone in the presence of poly(ethylene glycol), using no-toxic Zn metal or calcium hydride as co-initiator instead of the stannous octoate. The composition of the copolymers can be varied by adjusting the polyester/polyether ratio.

The above polymers can be used in mixtures of two or more of polymers in the same or different class. For example, in two polymer mixtures measured in weight percent of the first polymer, such mixtures can comprise 10-15%, 15-20%, 20-25%, 25-30%, 30-35%, 35-40%, 40-45% or 45-50%. Or, for example where three polymers are used: the first can comprise 10-15%, 15-20%, 20-25%, 25-30%, 30-35%, 35-40%, 40-45% or 45-50% of the whole of the polymer components, and the second can 10-15%, 15-20%, 20-25%, 25-30%, 30-35%, 35-40%, 40-45% or 45-50% of the remainder.

Biocompatible membranes can be formed against a solid material, such as by coating onto glass, carbon that is surface modified to increase hydrophobicity, or a polymer (such as polyvinyl acetate, PDMS, Kapton®, a perfluorinated polymer, PVDF, PEEK, polyester, or UHMWPE, polypropylene or polysulfone). Polymers such as PDMS provide an excellent support that can be used to establish openings on which biocompatible membranes can be formed.

Coating methods which can be used to form electrodes include a first coating or lamination of conductor, followed by plating, sputtering or using another coating procedure to coat with titanium or a noble conductor such as gold or platinum. Another method is directly sputtering an attachment layer, such as chromium or titanium onto the support, followed by plating, sputtering or other coating procedure to attach a noble conductor. The outer metal layer can be favorably treated to increase its hydrophobicity, such as with dodecane-thiol.

Supports with high natural surface charge densities, such as Kapton and Teflon, are in some embodiments preferred. As noted above, these can be used to form the anode/cathode barrier without the use of surface electrodes.

Using polypeptides having both the oxidation/reduction and proton pumping functions, and which consume electron carrier, the acidification of the fuel side caused by the consumption of electron carrier is offset by the export of protons from the anode to the cathode. Net proton pumping in conjunction with reduction of an electron carrier can in some circumstances exceed 2 protons per electron transfer – assuming in this instance coupling to electron transfer. If needed, in some embodiments care must be taken to buffer or accommodate excess de-acidification on the fuel side or excess acidification of the product side.

Applicants have shown that biologically catalyzed proton transfer can occur against large gradients (pH 8 or higher at anode side to pH 5 or lower at cathode side).

Additionally, the invention can be operated using more traditional means for transporting or otherwise conveying protons to the cathode chamber. For example, the intermediate chamber can comprise a proton-conducting solid polymer electrolyte membrane (a proton-conductive polymeric membrane). Such a proton-conductive polymeric membrane can be formed of Nafion<sup>TM</sup> polymer (discussed above). Also useful are perfluorinated sulfonic acid polymer membranes such as Aciplex<sup>TM</sup> (manufactured by Asahi Glass Co., Japan) and polymer membranes made by Dow Chemical Co., USA, such as XUS13204.10, which are similar in properties to Nafion<sup>TM</sup>. Proton-conductive polymeric membranes of polyethylene and polypropylene sulfonic acid, polystyrene sulfonic acid and other polyhydrocarbon-based sulfonic acids (such as membranes made by RAI Corporation, USA) can also be used depending on the temperature and duration of fuel cell operation. Composite proton-conductive polymeric membranes consisting of two or more types of proton-conducting cation-exchange

polymers with differing acid equivalent weights, or varied chemical composition (such as modified acid group or polymer backbone), or varying water contents, or differing types and extents of cross-linking (such as cross linked by multivalent cations e.g., Al 3+, Mg 2+ etc.,) can be used to achieve low fuel permeability. Such composite proton-conductive polymeric membranes can be fabricated to achieve high ionic conductivity, low permeability for the liquid fuel and good electrochemical stability. As described further below, enzyme-mediated active proton transport can be used in conjunction with proton conductive polymer membranes.

The electrodes can be formed by directly depositing a conductive material onto one or each side of an appropriate proton-conductive polymeric membrane separating the anode and cathode sides of a fuel cell. One such deposition method, which utilizes a polymer ink containing platinum, platinum-ruthenium, or the like, is described in Chun et al., WO 99/39841.

Reduced transmission of feeder molecules (such as methanol) from the anode chamber to the cathode chamber can be obtained by appropriate selection of the material (e.g., dielectric) intervening between the anode and cathode electrodes. Yen, WO 97/19480, for example, teaches sulfated and crosslinked poly ethyl ether ketone (PEEK) polymers and sulfated and crosslinked poly (p-phenylene ether sulfone) (PES) polymers that conduct protons, but have reduced methanol permeability. (Yen's polymer addressed the high solvent transport his group encountered with Nafion<sup>TM</sup> polymers operating at higher temperatures (above 60 °C) than needed in the present invention.) Similarly, Prakash, WO 98/22989 describes proton-conductive polymeric membranes made of sulfated polystyrene crosslinked with divinylbenzene to achieve reduced methanol transmission. A "pore-plugging" approach to limiting methanol transmission is described in Kindler, WO 99/40237. Where the electron acceptor molecule is gaseous oxygen, the membrane can be treated to enhance water repellency, thereby reducing water infiltration to the cathode chamber, as described by Kindler, US Patent 5,992,008. Additional proton-conductive polymeric membranes for excluding methanol crossover are described in Banerjee et al., US Patent 5,672,438.

The perforations in the barrier can be used to support the biocompatible membranes discussed above, or can open into a proton-conductive polymeric membrane. A mix of biologically-based proton conduction and passive proton conduction can be

used to moderate the balance between proton consumption, proton production and proton transport.

In another embodiment, redox enzymes are placed in the anode compartment, optionally deposited on or adjacent to the first electrode, while a proton transporter is  
5 incorporated into the biocompatible membranes on the perforations.

The perforations 49 are illustrated as openings. However, these can also comprise porous segments of the dielectric substrate 42. Alternatively, these can comprise polymeric membranes spanning the perforations 49 to support the biocompatible membrane. Preferably, enzyme density in the biocompatible membrane is  
10 high.

The orientation of polypeptide in the biocompatible membrane can be random, with effectiveness of proton pumping dictated by the asymmetric presence of substrate such as protons and electron carrier. Alternatively, orientation is established for example by using antibodies to the enzyme present on one side of the membrane during formation  
15 of the enzyme-biocompatible membrane complex.

The perforations 49 and metallized surfaces (first electrode 44 and second electrode 45 (for embodiments that use so-located electrodes)) of the dielectric substrate 42 can be constructed, for example, with masking and etching techniques of photolithography well known in the art. Perforations can also be formed, for example,  
20 by punching, drilling, laser drilling, stretching, and the like. Alternatively, the metallized surfaces (electrodes can be formed for example by (1) thin film deposition through a mask, (2) applying a blanket coat of metallization by thin film then photo-defining, selectively etching a pattern into the metallization, or (3) photo-defining the metallization pattern directly without etching using a metal impregnated resist (DuPont  
25 Fodel process, Drozdyk et al., "Photopatternable Conductor Tapes for PDP Applications," Society for Information Display 1999 Digest, 1044-1047; Nebe et al., US Patent 5,049,480). In one embodiment, the dielectric substrate is a film. For example, the dielectric can be a porous film that is rendered non-permeable outside the "perforations" by the metallizations. The surfaces of the metal layers can be modified  
30 with other metals, for instance by electroplating. Such electroplatings are, for example, with titanium, gold, silver, platinum, palladium, mixtures thereof, or the like. In addition to metallized surfaces, the electrodes can be formed by other appropriate conductive materials, which materials can be surface modified. For example, the electrodes can be

formed of carbon (graphite), including graphite fiber, which can be applied to the dielectric substrate by, for example, electron beam evaporation, chemical vapor deposition or pyrolysis. Surfaces to be metallized can be solvent cleaned and oxygen plasma etched. Useful means of forming hydrophilic electrodes are described for  
5 example in Surampudi, US Patent 5,773,162, Surampudi, US Patent 5,599,638, Narayanan, US Patent 5,945,231, Kindler, US Patent 5,992,008, Surampudi, WO 96/12317, Surampudi, WO 97/21256 and Narayanan, WO 99/16137.

Biomembrane layers (e.g., biocompatible membranes including lipid membranes) used in the invention are optionally stabilized against a solid support. One method for  
10 accomplishing such stabilization uses sulfur-mediated linkages of lipid-related molecules to metal surfaces to tether biocompatible membranes. For example, a porous support can be coated with a sacrificial or removable filler layer, and the coated surface smoothed by, for example, polishing. Such a porous support can include any of the proton-conductive polymeric membranes discussed, typically so long as the proton-conductive polymeric  
15 membrane can be smoothed following coating, and is stable to the processing described below. One useful porous support is glass frit. The smoothed surface is then coated (with prior cleaning as necessary) with metal, such as with a first layer of chrome and an overcoat of gold. The sacrificial material is then removed, such as by dissolution, taking  
20 with it the metallization over the pores but leaving a metallized surface surrounding the pores. The sacrificial layer can comprise photoresist, paraffin, cellulose resins (such as ethyl cellulose), and the like.

The tether comprises alkyl thiol, alkyl disulfides, thiolipids and the like adapted to tether a biocompatible membrane as illustrated in **Figures 7A and 7B**. Such tethers are described for example in Lang et al., Langmuir 10: 197-210, 1994. Additional  
25 tethers of this type are described in Lang et al., US Patent 5,756,355 and Hui et al., US Patent 5,919,576.

In operating fuel cells of the invention, Applicants believe that, at the cathode side, one or both of tetramethyl ammonium salt and Tris can provide cations, while one or all of sulfate, chloride and phosphate can provide anions. At the anode side,  
30 Applicants believe that one or all of tetramethyl ammonium formate, Tris formate, Tris hydrochloride, tetramethyl ammonium chloride, MES buffer and HEPES-KOH buffer can be used. Appropriate concentrations, and additional components such as NaCl can be determined through ordinary experimentation.

In one embodiment of the invention, a dehydrogenase enzyme having proton-pumping capacity is directly associated with a proton-conductive polymeric membrane, such as the sulfonated polymers described above. For example, the biocompatible membrane can be stabilized against the proton-conductive polymeric membrane. In one  
5 embodiment, the biocompatible membrane is tethered to the proton-conductive polymeric membrane as described above. With thiol-mediated tethers, a sputtered partial coating of gold can provide the anchor.

Where the cathode compartment is adapted to operate with hydrogen peroxide as the electron acceptor molecule, the electrode is preferably free of surface metal. For  
10 example, a graphite electrode can be used. Otherwise, for example, the cathode electrode coatings can, for example, include titanium, platinum or any noble metal, or a non-metallic conductor such as graphite or a conductive polymer.

As illustrated in Figure 3C, electrical contact 54 connects the first electrode 44 to a prospective electrical circuit, while electrical contact 55 connects the second electrode  
15 45.

In one embodiment, the cathode side of the fuel cell is comprised of an aqueous liquid with dissolved oxygen or hydrogen peroxide. For oxygen, one can use an emulsion containing a composition which effectively dissolves oxygen (e.g., see, Riess, et al., Fluorocarbon-Based In Vivo Oxygen Transport and Delivery Systems Vox Sang.,  
20 61:225-239 (Dec. 1991), and Weers, et al., US Patent No. 5,914,352).

The use of simple feeder molecules and high energy density electron acceptor molecules allows a simple way to restore power by replacing these fluids. As described in copending Serial No. 60/339,118, filed December 11, 2001, hydrogen peroxide can be used as a source for O<sub>2</sub>.

25 The above discussion of the embodiments using proton transport focus on the use of both faces of a substrate to provide the electrodes, thereby facilitating a more immediate transfer of protons to the product side where the protons are consumed in reducing the electron acceptor molecules. However, it will be recognized that in this embodiment structures such as a porous matrix can be interposed between the fuel side  
30 and the product side. Such an intervening structure can operate to provide temperature shielding or scavenger molecules that protect, for example, the enzymes from reactive compounds. The porous matrix is, for example, made up of inert fibers such as asbestos,

sintered materials such as sintered glass or beads of inert material. Or, the porous matrix is an electrolyte membrane materials such as one of those discussed above.

The fuel cell operates within a temperature range appropriate for the operation of the redox enzyme or proton transporter. This temperature range typically varies with the stability of the enzyme, and the source of the enzyme. To increase the appropriate temperature range, one can select the appropriate redox enzyme from a thermophilic organism, such as a microorganism isolated from a volcanic vent or hot spring. Additionally genetically modified enzymes can be used. Nonetheless, preferred temperatures of operation of at least the first electrode are about 80°C or less, preferably 60°C or less.

The anode electrode can be coated with an electron transfer mediator (including electron carriers serving as electron transfer mediators) such as an organometallic compound which functions as a substitute electron recipient for the biological substrate of the redox enzyme. Similarly, the biocompatible membrane of the embodiment of Fig. 3 or structures adjacent to the biocompatible membrane can incorporate such electron transfer mediators, or the electron transfer mediator can be more generally available in the anode chamber. Such organometallic compounds can include, without limitation, dicyclopentadienyliron ( $C_{10}H_{10}Fe$ , ferrocene, available along with analogs that can be substituted, from Aldrich, Milwaukee, WI), platinum on carbon, and palladium on carbon. Further examples include ferredoxin molecules of appropriate oxidation/reduction potential, such as the ferredoxin formed of rubredoxin and other ferredoxins available from Sigma Chemical. Other electron transfer mediators include organic compounds such as quinone and related compounds. Still further electron transfer mediators are methylviologen, ethylviologen or benzylviologen (CAS 1102-19-8; 1,1'-bis(phenylmethyl)-4,4'-bipyridinium,  $N,N'$ - $\gamma,\gamma'$ -dipyridylum), and any listed below in the definition of electron transfer mediator.

The anode electrode can be impregnated with the redox enzyme, which can be applied before or after the electron transfer mediator. One way to assure the association of the redox enzyme with the electrode is simply to incubate a solution of the redox enzyme with electrode for sufficient time to allow associations between the electrode and the enzyme, such as Van der Waals associations, to mature. Alternatively, a first binding moiety, such as biotin or its binding complement avidin/streptavidin, can be attached to



the electrode and the enzyme bound to the first binding moiety through an attached molecule of the binding complement. Additional methods of attaching enzyme to electrodes or other materials, and additional electron transfer mediators are described in Willner and Katz, Angew. Chem. Int. Ed. 39:1181-1218, 2000. The anode chamber can include feeder enzyme or enzymes adjacent to or associated with the anode electrode, or separate therefrom. For example, the redox enzyme or feeder enzyme can be attached to the anode chamber side of a polymer forming a proton conductive anode/cathode barrier, with a layer of conductive material on the anode side providing the anode electrode. In some embodiments of the invention, it is anticipated that the electron carrier will be effective to transfer electrons to the anode electrode in the absence of redox enzyme.

The redox enzyme can comprise any number of enzymes that use an electron carrier as a substrate, irrespective of whether the primary biologically relevant direction of reaction is for the consumption or production of such reduced electron carrier, since such reactions can be conducted in the reverse direction. Examples of redox enzymes further include, without limitation, glucose oxidase (using NADH, available from several sources, including number of types of this enzyme available from Sigma Chemical), glucose-6-phosphate dehydrogenase (NADPH, Boehringer Mannheim, Indianapolis, IN), 6-phosphogluconate dehydrogenase (NADPH, Boehringer Mannheim), malate dehydrogenase (NADH, Boehringer Mannheim), glyceraldehyde-3-phosphate dehydrogenase (NADH, Sigma, Boehringer Mannheim), isocitrate dehydrogenase (NADH, Boehringer Mannheim; NADPH, Sigma), and  $\alpha$ -ketoglutarate dehydrogenase complex (NADH, Sigma).

The redox enzyme can also be a transmembrane pump, such as a proton pump, that operates using an electron carrier as the energy source. In this case, enzyme can be associated with the electrode in the presence of detergent and/or lipid carrier molecules which stabilize the active conformation of the enzyme. As in other embodiments, an electron transfer mediator can be used to increase the efficiency of electron transfer to the electrode.

The redox enzyme or feeder enzyme can be adjacent to or associated with the anode electrode or separate therefrom. Adjacency includes being incorporated into a polymeric membrane linked to or contacting the anode electrode. The redox enzyme can include one of the feeder enzymes. For example, the redox enzyme or feeder enzyme can be attached to the anode chamber side of a polymer forming a proton conductive

anode/cathode barrier, with a layer of conductive material on the anode side providing the anode electrode. Suitable coupling methods include those described by Willner and Katz, Angew Chem Int. Ed. 39: 1180-1218, 2000.

The associated electron carriers are readily available from commercial suppliers  
5 such as Sigma and Boehringer Mannheim. The concentrations at which the reduced form of such electron carriers can be as high as needed to optimize the function of the redox enzyme. The salt and buffer conditions are designed based on, as a starting point, the ample available knowledge of appropriate conditions for the redox enzyme. Such enzyme conditions are typically available, for example, from suppliers of such enzymes.

10 **Figure 4** schematically illustrates an exemplary fuel cell 20. Anode chamber 11 is associated with an optional fuel source (FS) reservoir 18, which provides fuel such as, without limitation, methanol, when the fuel concentration in the anode chamber 11 becomes reduced. The location of the anode electrode 14, intermediate chamber/  
dielectric layer 12, and the cathode electrode 15 are indicated. Cathode chamber 13 is  
15 associated with optional electron acceptor molecule (EA) reservoir 19, which provides electron acceptor molecules, such as, without limitation, hydrogen peroxide, when the concentration in the cathode chamber 13 becomes reduced.

In the anode chamber, the feeder enzymes can be in solution or fixed to a support, such as polymer particles that fill the anode chamber, or incorporated into a matrix (such  
20 as a hydrogel matrix, such as PEG or polyacrylamide). The concentration of fuel maintained in the anode chamber is selected on the basis of a number of factors such as the effect on enzyme efficiency, the concentration needed to assure kinetic factors do not lead to at least localized concentration drops in fuel or electron carrier molecules (reduced form) affecting performance, the amount that enzyme efficiency losses can be  
25 addressed with excess enzyme, effects on redox enzymes, and the like. In the FS reservoir, the concentration of fuel can be neat, diluted with water in an amount selected to provide a replacement for the H<sub>2</sub>O consumed in the feeder reactions (for MeOH fuel fully consumed to CO<sub>2</sub>, 1 mol water (18 mL) per mol MeOH(40.6 mL)), or have a greater degree of dilution with water. In this context, "an amount selected to provide a  
30 replacement for the H<sub>2</sub>O consumed in the feeder reactions" means the replacement amount determined empirically to provide continuing operation of the fuel cell. Or, fuel concentration in the FS reservoir can be reduced to the degree that occurs during the life of the fuel cell or a cycle of the life of the fuel cell due to liquid flows back into the FS

reservoir. Fuel concentration in the fuel side (in the anode chamber) is selected to allow sufficiently effective operation of the enzymes used to extract energy. Where the fuel is an alcohol, the concentration in the anode chamber is selected to allow a useful turnover rate for the enzymes in use, and not disrupt the integrity of any biocompatible

5 membrane.

The concentration of electron acceptor molecules in the cathode chamber is, where the electron acceptor molecule is a peroxide, selected on such factors as the amount that can be introduced without contacting undue amounts with the biologically-derived molecules at the anode electrode. The cathode electrode can be designed so that  
10 the flow pathway through the electrode brings many surfaces for electron transfer (and hence quenching) near any prospective pathway for peroxide. In the EA reservoir, where the electron acceptor molecule is a peroxide, the concentration can be the highest commercially available in an appropriate grade, or less. For example, for hydrogen peroxide, the concentration can be any commercially available concentration, such as  
15 60% (w/w) or 30%. Note that with hydrogen peroxide, the pH of the cathode chamber is preferably kept low, such as pH 5, 4, 3 or lower.

Figures 8A to 8D illustrate how the electron acceptor molecules (as illustrated) or fuel can be replaced. As will be recognized, corresponding structures are available on the fuel side. In the illustrations of Figures 8A and 8B, an external reservoir 26 is fitted  
20 to EA reservoir 19 using fitting 28 which has a bevelled proboscis structure 28A. Fitting 28 fits into second fitting 27, which has a seal 27A that is pierced by proboscis structure 28A. As will be understood, any number of coupling devices can be used. The devices can have a seal for at least the external reservoir pierced with the coupling operation. The external reservoir is illustrated as secured by locking elements 29A and 29B. Any  
25 number of locking mechanisms can be used, including screw fittings and locking elements integrated into the first and second fittings, such as are found in Luer<sup>TM</sup>-lock fittings. Fluid flow between the more permanent parts of the fuel cell and the external reservoir(s) can be accentuated by using two or more fluid connections, as illustrated in Figure 8C. Figure 8C also illustrates the use of a pump 30 with intake/outlet 31 to  
30 pump fluid between the external reservoir 26 and EA reservoir 19. The pump can be operated initially, typically using electrical power drawn from the operation of the fuel cell, intermittently as appropriate to enhance or synchronize with power production, or constantly during power production. Other methods can be used to assure transport, such

as the externally operated system illustrated in **Figure 8D**, in which check valve 32 (which can be any check valve, though illustrated as a spring-loaded check valve) operates to assure that pressure applied (such as by the force vector illustrated with the arrow) to a flexible surface of the device (such as surface 33) induces flow, such as from sub-reservoir 26A to sub-reservoir 26B. Such devices as pumps or check valves can have resistance to flow when not in operation such that fluid leakage is minimized when an external reservoir is removed (e.g., vertically lifted off of the fuel cell). It should be apparent that the anode chamber EA reservoir 19, cathode chamber, or FS reservoir 18 can be of minimum size, such as no more than required plumbing, or absent, when external reservoirs are used.

The chambers can contain baffles, such as illustrated with baffles 34 for a cathode chamber 13 in **Figure 9**. The same arrangement can be used in the anode chamber. The baffles serve to direct exhausted fluid to an exit point 37 that can be controlled with pumps or check valves. Fresh fluid is inserted upstream such as at intake 36, which can be controlled with pumps or check valves. A diffuser 35 can be used to help distribute the fresh fluid.

Pumps used to regulate fluid flow can be micro-diaphragm pumps, such as are available from Dr. Peter Woias of Fraunhofer IMS, Munich, Germany or Institut für Mikrotechnik Mainz GmbH, Mainz, Germany.

#### **Multi-Tiered Proton Conductive Membranes**

The biocompatible membrane with incorporated proton pumping enzyme provides one form of anode/cathode barrier. As noted, some embodiments of the invention use a more traditional form of anode/cathode barrier: a polymeric membrane selected for its ability to passively conduct protons. The former anode/cathode barrier is useful since it is effective to pump against a proton gradient.

It has now been observed that desirable results are obtained when dual membranes or barriers form across the pores of an anode/cathode barrier. These membranes can be of the traditional composition or biocompatible membranes. One context in which such dual membranes are observed are those in which the pores are of relatively narrow diameter. Another context is one in which the anode cathode barrier is formed of sandwiched materials such that separate junctions between differing materials nucleate the formation of separate biocompatible membranes across the pore.

Without limitation to theory, it is believed that the second, more cathode proximate biocompatible membrane, operates to some degree passively, as the pumping from the first biocompatible membrane creates a high proton concentration, driving passive transport to the cathode compartment. Thus, to the extent the cathode compartment contains peroxide that could prospectively damage the transport protein, the active transport function can be damaged, while the second biocompatible membrane insulates the first from higher concentrations of the peroxide.

In one embodiment, the dual membrane benefit is obtained with one or more biocompatible membranes, the first of which (at the anode side) incorporates the active transport enzyme, and a proton-conductive polymeric membrane fitted at the cathode chamber side to limit peroxide transit towards the biocompatible membranes. Again, an intermediate zone between the biocompatible membrane(s) and the proton-conductive polymeric membrane gains a high proton concentration due to active transport, driving further transit along a concentration gradient into the cathode compartment.

In one embodiment, the substrate in which the pores are formed is a sandwich of dielectric Kapton, and conductive Kapton (conductive through the presence of incorporated graphite). The conductive Kapton can form the anode electrode, or be appropriately metallized to form the anode electrode. The three layers are relatively hydrophilic, relatively hydrophobic, then relatively hydrophilic.

#### Regulating Delivery of Fuel From the FS or EA Reservoir

One mechanism for delivering fuel to the anode chamber 11 uses a porous membrane 21 that is not wetted by either the fuel of the FS reservoir and the solvent/solution of the anode chamber, as illustrated in **Figures 5A and 5B**. For example, the membrane can be formed of perfluoro polymer, such as Teflon, or a polyethylene polymer ("PE") such as ultra high molecular weight polyethylene ("UHMWPE") (a term recognized in the art; see J. J. Coughlan, and D. P. Hug, "Ultra-high molecular weight polyethylene," in Encyclopaedia of Polymer Science and Engineering, New York, John Wiley & Sons, 1986, pp. 490-494). Thus, transfer across the membrane 21 is via the vapor phase transmitted through pores 22. The fuel can be selected to have a higher vapor pressure at the operating temperature, assuring that the highest transmission rate is in the desired direction, indicated with the arrows. A heater 23, such as a resistance heater, can be operated from excess power production from the

fuel cell to heat the fuel adjacent to the membrane to increase transmission. The same mechanism can be used to meter electron acceptor composition to EA reservoir 13. Pore diameters are preferably from 0.02 to 2 micron, more preferably from 0.2 to 1 micron. Pores are formed, for example, by laser drilling, stretching, and the like.

5           Another form of transport from a reservoir to a reaction chamber (or another chamber intermediate to the reaction chamber) is illustrated in **Figures 11A-11D**. This transport device and method, like the others described in this application, can be used in any device needing reactant transport from a reservoir to a reaction chamber. As illustrated, the reactant concentrate, **Liquid A**, is separated from the liquid in the reaction  
10 chamber, **Liquid B**, by membrane 81, which is a composite structure. Internal conduit 84 is adapted to deliver gas to pores 82 that connect **Liquid A** to **Liquid B**. Optionally, the material forming the membrane 81 can be one not wetted by **Liquid A** or **Liquid B** (typically a hydrophobic material), such that the operative principle of the structure of **Figures 11A** and **11B** contributes to the operation of this structure. When the reactant  
15 concentrate is not needed, such as when the fuel cell is not operating, gas is drawn or injected to assure separation of **Liquid A** and **Liquid B**. **Figure 11D** illustrates gas insertion, and **Figure 11A**, the initial gas-separated state. Gas injection is regulated by pressure, or by amount, utilizing regulator devices and, where appropriate, feedback loops to control electronics, as is known in the art. Or, the lack of wetting of the  
20 membrane creates a force drawing in the gas to create separation of **Liquid A** and **Liquid B** in the absence of flow-inducing pressure on **Liquid A**. **Liquid A** is pressurized (beyond the pressure of the gas) to initiate flow across the pores 82. To end flow across membrane 81, gas is again injected as in **Figure 11D**.

To initiate flow across membrane 81, pressure is created in **Liquid A**, for  
25 example with a pump, pressure applied to a deformable outer wall of the **Liquid A** chamber, injected gas, or using other methods or devices known in the art. The gas injected into the system for pressurizing, or for filling the pores 82 can be removed from the system with the methods used to remove CO<sub>2</sub>. The wetting forces that draw in gas create a self-actuating capillary break between **Liquid A** and **Liquid B**.

30           One method of creating the internal conduit 84 is by making the membrane 81 from a sandwich of first solid polymer layer 81A, porous matrix 85 (preferably formed of a material not wetted by **Liquid A** or **Liquid B**), and second solid polymer layer 81B. Porous matrix 85 can be a mesh, or a porous polymer material, for example a Teflon or

PE foam (such as an UHMWPE foam). Adhesive or heat or ultrasonic welds or the like, for example, are strategically placed to assure the structural integrity of the composite, without interfering with gas flow to the pores. Materials for the solid polymer layers and porous matrix include Teflon, PE (including UHMWPE), and any other polymer with appropriate wetting properties and stability in the intended fuel cell environment. The porous matrix can, for example, be formed of mesh, weave, pressed fiber, or the like, or of a porous material formed, for example, with a foam, sintered fiber, or the like. Diameters for the pores 82 forming the capillary barriers are preferably from 0.5 micron to 100 micron, more preferably from 10 micron to 50 micron. Pores 82 are formed, for example, by punching, drilling, laser drilling, stretching, and the like. The porous matrix 85 can be selected so that the average internal pores that carry gas are from 0.2 micron to 2 micron diameter, more preferably from 0.5 micron to 1 micron.

In enzyme based fuel cells the fuel can be metered into the reaction chamber over a large surface area to promote efficient diffusional mixing. In addition it is desirable to feed multiple cells within the battery from a single reservoir. In order to maintain the battery as compact as possible the cells can be, for example, arranged in a stacked configuration. As illustrated in Figure 6, anode capillary wicks 25 and cathode capillary wicks 24 can be used to distribute fuel from FS reservoir 18 or electron acceptor molecules from EA reservoir 19, respectively.

The capillary wicking structures are, for example, fabricated out of mats of oriented fibers such as fiberglass. This manner of reactants distribution is unaffected by battery orientation. Figure 6 shows a battery containing four cells. For illustrative purposes, the fuel and oxidizer are shown in a diametrically opposed orientation. However, the two reservoirs can be oriented at right angles to each other or even stacked on top of each other with proper manifolding. The separate wicks for fuel or electron acceptor molecules can be joined so that the metering process is effected with a single element, simplifying manufacture or, potentially, maintenance. While Figure 6 illustrates a metering mechanism applied for both the fuel and the electron acceptor molecules, it will be recognized that metering is more important for delivering fuel in those circumstances where the enzymes used are sensitive to the concentration of fuel that would be supplied in the FS reservoir.

If sensing for fuel concentration is needed to regulate fuel delivery, such sensors are described for example in Narayanan, WO 98/45694. Fuel delivery and mixing can,

in addition to the methods described above, be done with the devices and methods described for example in Surampudi et al., US Patent 5,599,638 and Surampudi et al., US Patent 5,773,162. Or, concentration control can be conducted using the detector and detector-dependent valve taught in US Patent 4,810,597, or the detector taught in

5 Narayanan et al., WO 98/45694.

The cathode chamber can be expandable, at least within the bounds of any exterior casing, such that any dilution due to the production of water at the cathode electrode can be countered by electron acceptor composition delivered from the EA reservoir.

10 Any CO<sub>2</sub> generated in the anode chamber can be drawn out by passing fluid (which can include liquid) from the anode chamber through tube of microporous polymer. Such tubes can be made of polymers such as Collard<sup>TM</sup> polymer (Celanese Corp.) or GoreTex<sup>TM</sup> polymer (porous polytetrafluoroethylene, Gore Association, USA). Tubes that circuit from one location in the walls of the anode chamber to another can be  
15 placed so that fluid flow to effect clearance of the gas occurs due to the tendency of the gas to rise and any pressure created due to the gas generated in operation. The exchange of carbonic acid to CO<sub>2</sub> (or the reverse reaction) can be catalyzed by carbonic anhydrase, which can be generally distributed or localized by crosslinking or strong association (e.g., avidin-biotin) with a matrix in the vicinity of CO<sub>2</sub> porous materials (as discussed  
20 above on linking enzymes to solid supports) or in the vicinity of CO<sub>2</sub> generation. Carbonic anhydrases are well known, including such enzyme from thermophilic organisms. For example, Alber et al. describe "A carbonic anhydrase from the archaeon *Methanosarcina thermophila*" in Proc. Natl. Acad. Sci. U.S.A. 91: 6909-6913, 1994. The enzyme from human or bovine erythrocytes is commercially available (e.g., Sigma  
25 Chemical, St. Louis). In one embodiment, the CO<sub>2</sub> is absorbed onto a suitable CO<sub>2</sub> absorbent, such as Ascarite, a mixture of silica and sodium hydroxide. Such absorbent is preferably integrated into the fuel cartridges so that snapping a fuel cartridge in creates a conduit from the CO<sub>2</sub> exits from the anode chamber to the absorbent.

Where CO<sub>2</sub> is vented directly into the atmosphere, activated charcoal can be used  
30 to remove any fuel that might be carried by the CO<sub>2</sub>, thus preferably removing fuel odor.

Carbonic anhydrase can be used to stabilize the CO<sub>2</sub> in the dissolved carbonic acid form, for example at the electrodes at which the CO<sub>2</sub> concentration may be high.



In one embodiment, the consumption of  $H_2O$  and fuel, and the withdrawal of  $CO_2$  from the anode chamber 11, driven by the lower free energy of the gaseous state, provides a volume deficit that draws fuel from FS reservoir 18. For example, as illustrated in Figure 10,  $CO_2$  is drawn through  $CO_2$  transmitting polymeric membrane 71, to  $CO_2$  manifold 73, and away as illustrated with the arrow. Fuel-conveying conduits 72, which can incorporate check valves, provide a pathway for fuel to replace  $CO_2$ . In one embodiment, an evacuating pump 74, which can be powered by the fuel cell, increases the efficiency with which  $CO_2$  is drawn outward. The pump can be provided by a microdiaphragm pump.

Another fuel distribution and  $CO_2$  removal device 90, illustrated in Figures 12A and 12B, can be considered with reference to a stacked cell device such as that illustrated in Figure 6, except where the ordering is cathode compartment (CC)/electrodes-membranes(EM)/anode compartment (AC)/AC/EM/CC/EM/AC/AC... and so on, meaning that each cathode compartment (or a pair adjacent but separated cathode compartments) operates with a cathode electrode on two sides, and each anode electrode is part of an adjacent pair. The AC/AC junction incorporates the device of Figures 12A and 12B. A first layer 91A of polymer, preferably one suitable for use in the device of Figure 5, such that it conveys fuel by vapor transport, is welded to a second layer 91B of, typically but not necessarily, the same polymer. The welds are designed to give interlocking finger shapes, such as illustrated in Figure 12B. A first set of the finger shapes convey methanol ( $MeOH$ ) or a substitute fuel, while the second set collects  $CO_2$ . The separation of the polymer layers in the finger structures is maintained by first porous medium 92A in the  $MeOH$  fingers, and second porous medium 92B in the  $CO_2$  fingers. These porous materials are preferably the same, based on ease of fabrication. First porous medium 92A is preferably a hydrophilic material, such as appropriately surface treated PE fibers or UHMWPE, selected to effectively wick the fuel. (Hydrophilic PE (and UHMWPE) are surface treated to make them hydrophilic, such as by plasma treatment.) The fuel is inserted from a fuel source at the location indicated by an inward arrow. A negative pressure can be applied to the vent indicated by the outward arrow of the  $CO_2$  fingers. As illustrated in Figure 12A, the distribution and  $CO_2$  removal device 90 is positioned to between two anode electrodes 14. Since the same reactions occur in Anode Chamber A as in Anode Chamber B, the distribution and  $CO_2$  removal device

90 need not, but optionally does, form a sealed (but for the transmissions through the polymer layers), electrically isolating barrier between these chambers.

The device of **Figure 12** can be used to deliver hydrogen peroxide in the cathode compartment. In this case, the CO<sub>2</sub> fingers can be omitted, or used to draw out (by vapor  
5 transmission, excess H<sub>2</sub>O created by cathode compartment chemistry. Also, the CO<sub>2</sub> removal function can be removed for the anode device (by removing the conduits for CO<sub>2</sub>), or the fuel delivery function can be removed (by removing the conduits for fuel) leaving CO<sub>2</sub> removal.

Another device **110** for removing CO<sub>2</sub> is shown in **Figure 13A**, which shows a  
10 grid support structure that provides a lattice that supports (a) the proton-conveying anode/cathode barrier and (b) a fuel-providing polymeric membrane such as described with respect to **Figure 5**. The grid support provides openings **111** between lattice members **112**. Preferably, the openings are less than or equal to 6mm in maximum width, more preferably less than or equal to 3mm. While a rectangular configuration is  
15 illustrated, any number of shapes are useful. The grid support is constructed of a hydrophobic open cell foam material that is porous, with the material and pore size selected to be conductive of CO<sub>2</sub>, while resisting the entrance of water and methanol (or other one carbon molecules or precursors thereof that can substitute as a fuel source). As illustrated in **Figures 13B** and **13C**, the device **110** can be mounted between an  
20 anode/cathode barrier and a membrane **21** that distributes fuel by vapor diffusion. A vacuum manifold **114** can be sealed to the edges, and a vacuum drawn, for instance with pump **115**. Exemplary materials for the foam material include UHMWPE foam, and foams of perfluoro polymers, such as Teflon.

In one embodiment, the anode electrode **14** is formed by appropriate conductive  
25 material applied to the sides of the lattice members **112**. For example, the conductor is applied by sputtering, with the sputtering parameters selected to leave pores for CO<sub>2</sub> extending through the electrode. Current can be drawn through conductor **117**, which is seen from a top view in **Figure 13E**, and through conductor **118**, which can form a circuit with the cathode electrode.

30 With respect to fuel and oxidant delivery systems, it will be apparent that the invention can be applied to any fuel cells that can usefully use liquid fuel or oxidant metering – so long as the compositions are compatible with the described delivery system. In particular, the invention relates to other fuel cells that use C1 fuel, or

hydrogen peroxide oxidant. Similarly, for CO<sub>2</sub> exhaust systems, the described inventions apply to any fuel cell that generates CO<sub>2</sub>.

A fuel cell of the invention with 300 mL or less of liquid can include, for example, a 1.0 mL anode chamber and a 1.0 mL cathode chamber. Such a fuel cell can use, for example, 11 mL of methanol (0.27 mole), which can be delivered from a separate FS reservoir. The electron acceptor molecules can be provided by a corresponding amount of hydrogen peroxide, which is 90 mL of 30% H<sub>2</sub>O<sub>2</sub> (which can be supplied from an EA reservoir). Such a fuel cell has 50 Wh in chemical energy. Increasing the size of the reservoirs leads to quick increases in chemical energy. A fuel cell with an increase of 200 mL in total volume (to 500 mL) has 150 Wh in chemical energy.

Note that those of ordinary skill will recognize that a number of features are represented in the drawings as planar, but other geometries can be used.

#### 15 **Reconditioning**

The fuel cell, in addition to being re-fueled, may on occasion require reconditioning for other components useful to maintain operational efficiency, such as with respect to the electron carrier, electron transfer mediator, salts, buffers, enzymes, and the like.

20

#### **Definitions**

The following terms shall have, for the purposes of this application, the respective meanings set forth below.

- **electron carrier:** An electron carrier is a molecule used to donate electrons in an enzymatic reaction. Electron carriers include, without limitation, reduced nicotinamide adenine dinucleotide (denoted NADH; oxidized form denoted NAD or NAD<sup>+</sup>), reduced nicotinamide adenine dinucleotide phosphate (denoted NADPH; oxidized form denoted NADP or NADP<sup>+</sup>), reduced nicotinamide mononucleotide (NMNH; oxidized form NMN), reduced flavin adenine dinucleotide (FADH<sub>2</sub>; oxidized form FAD), reduced flavin mononucleotide (FMNH<sub>2</sub>; oxidized form FMN), reduced coenzyme A, and the like. Electron carriers include proteins with incorporated electron-donating prosthetic groups, such as coenzyme A, protoporphyrin IX, vitamin B12, and the like. Further electron carriers include gluconic acid (oxidized form: glucose), oxidized alcohols (e.g.,

ethylaldehyde), and the like. It will be recognized that C<sub>1</sub> compounds comprising carbon oxygen and hydrogen are electron carriers. Also within the definition of electron carrier are electron transfer mediators, as specified below.

- **electron acceptor molecules:** An electron acceptor molecule is a compound which  
5 receives the electrons conveyed to the cathode by the fuel cell.
- **electron transfer mediator:** An electron transfer mediator is a composition which facilitates transfer of electrons released from an electron carrier to another molecule, typically an electrode or another electron transfer mediator with an equal or lower reduction potential. Examples include phenazine methosulfate (PMS), pyrroloquinoline  
10 quinone (PQQ, also called methoxatin), Hydroquinone, methoxyphenol, ethoxyphenol, or other typical quinone molecules, methyl viologen, 1,1'-dibenzyl-4,4'-dipyridinium dichloride (benzyl viologen), N,N,N',N'-tetramethylphenylenediamine (TMPD) and dicyclopentadienyliron (C<sub>10</sub>H<sub>10</sub>Fe, ferrocene).
- **feeder enzyme:** A feeder enzyme is one that generates a reduced electron carrier from  
15 (i) the oxidized form and (ii) another organic molecule (feeder molecule) that is oxidized in the process. The feeder molecule is typically a relatively simple molecule.
- **feeder molecule:** A feeder molecule is as defined in the above section on feeder enzymes.
- **feeder reactions:** A feeder reaction is one catalyzed by a feeder enzyme.
- 20 • **membrane associated polypeptide:** A membrane associated polypeptide is a polypeptide that normally functions in association with a biological membrane.
- **redox enzyme:** An redox enzyme is one that catalyzes the transfer of electrons from an electron carrier to another molecule, or from another molecule to the oxidized form of an electron carrier. Dehydrogenase enzymes are a specific subclass of redox enzymes.
- 25 • **polypeptide-catalyzed:** Reference to polypeptide-catalyzed means that a polypeptide provides the framework for the active site of catalysis, it does not exclude the presence of associated or covalently bound cofactors that participate in catalysis.
- **synthetic biocompatible membrane:** A synthetic biocompatible membrane is a membrane that is partly or completely comprised of amphipathic molecules that are  
30 either wholly synthetic or modifications of naturally occurring molecules, in which it is possible to immobilize functional biomolecules, such as polypeptides, lipids, phospholipids or fatty acids. Examples of such biocompatible membranes include

block copolymers and thiolipids. In one preferred embodiment, such a biocompatible membrane is one that would not form from the amphipathic molecules present but for the presence of block copolymers

- 5           The following examples further illustrate the present invention, but of course, should not be construed as in any way limiting its scope.

**Example 1**

          A fuel cell is formed using a disk formed of Teflon polymer electroplated on both sides with gold (20-mil or ~0.5 mm total thickness), with one or more milled apertures  
10   through the disk of 0.3 to 1 mm width, such as 0.39 mm. A biomembrane is formed across the apertures with a phospholipid composition dissolved in solvent (in this case, 45% Methanol, 45% chloroform, 10% decane). The organic lipid solution was deposited onto the self-assembled thiol monolayer on an electrode assembly immersed in electrolyte (25 mM Tris-HCl pH 7.0 with 100 mM NaCl), and a layer of the mixture was  
15   drawn across the aperture and allowed to thin. Care was taken to maintain sufficiently equal hydrostatic pressure on both sides of the aperture.

          Incorporation of the polypeptide (e.g., the proton transporting enzyme complex I) is accomplished by fusion with the biomembrane, in a solution containing 10 mM calcium chloride, of vesicles that contained the polypeptide. Use of calcium as an agent  
20   to promote the fusion of vesicles with membranes is well recognized in the art, as illustrated by: Landry et al., "Purification and Reconstitution of Epithelial Chloride Channels," 191 Methods in Enzymology 572, 582 (1990) (at 582); Schindler, "Planar Lipid-Protein Membranes...", 171 Methods in Enzymology 225, 226 (1989). More specifically, the vesicles are injected onto the biomembrane, then incubated on the anode  
25   side in a relatively small volume, such as 500 microliter. This is essentially the method of Landry et al. (at 582), or Schindler (at 236). The protein-containing vesicles are prepared by incubating a detergent solution of the protein with vesicles that had been freshly formed from lipids using sonication. This is essentially the method described in Schindler at 252 (which uses vortexing instead of sonication). This method has been  
30   successfully applied to incorporate complex I as obtained from over-expressing *E.coli* into a stable membrane formed across a perforation in a Teflon barrier.

          The test device, with anode and cathode compartments, was constructed from Delran plastic, with the compartments separated by the aperture-containing disk

described above. The disk was sealed in place with rubber gaskets. Connections were made to an electrometer, using gold connecting wires in parallel with an electronically varied external load. Power has been generated using 3.3 mM NADH as fuel with 2 mM benzyl viologen in the anode compartment to act as the electron transfer mediator.

5 **Example 2**

The device of Example 1 is used with a membrane formed of a biocompatible membrane formed of non-lipid polymers, as described in US Serial No. 60/283,823. Such compositions, when composed primarily on non-ionic species, are particularly preferred for fuel cells that generate higher voltages.

10

All publications and references, including but not limited to patents and patent applications, cited in this specification are herein incorporated by reference in their entirety as if each individual publication or reference were specifically and individually indicated to be incorporated by reference herein as being fully set forth. Any patent application to which this application claims priority is also incorporated by reference  
15 herein in its entirety in the manner described above for publications and references. The priority applications and certain other co-owned applications that copended with the priority applications are also incorporated by reference in their entirety; these are: No. 60/283,823, 13-Apr-2001 (Dkt. 367952-101P); No. 60/283,717, 13-Apr-2001 (Dkt. 367952-102P); No. 60/339,117, 11-Dec-2001 (Dkt. 367952-102PA); No. 60/283,786,  
20 13-Apr-2001 (Dkt. 367952-103P); No. 60/357,481, 15-Feb-2002 (Dkt. 367952-103PA); No. 60/283,719, 13-Apr-2001 (Dkt. 367952-104P); No. 60/357,367, 15-Feb-2002 (Dkt. 367952-107P).

While this invention has been described with an emphasis upon preferred  
25 embodiments, it will be obvious to those of ordinary skill in the art that variations in the preferred devices and methods may be used and that it is intended that the invention may be practiced otherwise than as specifically described herein. Accordingly, this invention includes all modifications encompassed within the spirit and scope of the invention as defined by the claims that follow.

30

What is claimed:

1. A fuel cell with an anode compartment and a cathode compartment comprising:

5 in the anode compartment, an anode electrode and one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound to electron carrier(s), and wherein or further comprising one of the following:

(i) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to the anode electrode,

10 (ii) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to electron transfer mediator(s) selected to be effective to deliver electrons to the anode electrode, wherein the anode compartment further comprises the electron transfer mediator(s),

15 (iii) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to a redox enzyme, the redox enzyme is selected to be effective to deliver electrons to second electron carrier(s), the second electron carrier(s) selected to be effective to deliver electrons to electron transfer mediator(s) selected to be effective to deliver the electrons to the anode electrode, wherein the anode compartment further comprises the redox enzyme, second electron carrier(s) and electron transfer mediator(s);

20 in the cathode compartment, a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and

25 a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment.

2. The fuel cell of claim 1, wherein (i) applies.
3. The fuel cell of claim 1, wherein (ii) applies.
- 5 4. The fuel cell of claim 1, wherein (iii) applies.
5. The fuel cell of claim 1, wherein the barrier comprises a proton-conductive polymeric membrane.
- 10 6. The fuel cell of claim 1, comprising the C<sub>1</sub> compound which is methanol or an oxidative product thereof.
7. The fuel cell of claim 1, wherein the cathode electrode is effective to convey the electrons to hydrogen peroxide in the cathode compartment.
- 15 8. The fuel cell of claim 1, wherein the cathode electrode is effective to convey the electrons to oxygen in the cathode compartment.
9. The fuel cell of claim 1, wherein the cathode electrode is effective to  
20 convey the electrons to a solid oxidant in the cathode compartment.
10. A method of producing electrical power comprising:  
in an anode compartment, enzymatically reducing electron carrier(s) with  
electrons from a C<sub>1</sub> compound, the electron carrier(s) selected to operate  
25 with the dehydrogenase enzymes;  
directly transferring the electrons from the electron carrier(s) to an anode  
electrode;  
transferring electrical current via an electrical conduit under an electrical load to a  
cathode electrode; and  
30 transferring the electrons from the cathode electrode to an electron acceptor  
composition.
11. A method of producing electrical power comprising:



- 47 -

- in an anode compartment, enzymatically reducing electron carrier(s) with  
electrons from a C<sub>1</sub> compound, the electron carrier(s) selected to operate  
with the dehydrogenase enzymes;  
directly transferring the electrons from the electron carrier(s) to the electron  
5 transfer mediator(s);  
transferring the electrons from the electron transfer mediator(s) to the anode  
electrode;  
transferring electrical current via an electrical conduit under an electrical load to a  
cathode electrode; and  
10 transferring the electrons from the cathode electrode to an electron acceptor  
composition.
12. A method of producing electrical power comprising:  
in an anode compartment, enzymatically reducing electron carrier(s) with  
15 electrons from a C<sub>1</sub> compound, the electron carrier(s) selected to operate  
with the dehydrogenase enzymes;  
enzymatically transferring the electrons from the electron carrier(s) to second  
electron carrier(s);  
directly transferring the electrons from the second electron carrier(s) to the  
20 electron transfer mediator(s);  
transferring electrons from the electron transfer mediator(s) to the anode  
electrode;  
transferring electrical current via an electrical conduit under an electrical load to a  
cathode electrode; and  
25 transferring electrons from the cathode electrode to an electron acceptor  
composition.

13. A fuel cell with an anode compartment and a cathode compartment  
comprising:  
30 in the anode compartment, an anode electrode and electron carrier(s);  
in the anode compartment, one or more dehydrogenase enzymes effective to  
transfer electrons from a C<sub>1</sub> compound to an electron carrier;

in the cathode compartment, a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and

5 a barrier separating the anode compartment from the cathode compartment but comprising a proton pumping polypeptide effective to transport protons from the anode compartment to the cathode compartment.

14. The fuel cell of claim 13, wherein or further comprising one of the  
10 following:

(i) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to the anode electrode,

15 (ii) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to electron transfer mediator(s) selected to be effective to deliver electrons to the anode electrode, wherein the anode compartment further comprises the electron transfer mediator(s),

20 (iii) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to a redox enzyme, the redox enzyme is selected to be effective to deliver electrons to second electron carrier(s), the second electron carrier(s) selected to be effective to deliver electrons to electron transfer mediator(s) selected to be effective to deliver the electrons to the anode electrode, wherein the anode compartment further comprises the redox enzyme, second electron carrier(s) and electron transfer mediator(s),

25 (iv) the electron carrier(s) are selected to operate with the dehydrogenase enzymes and to be effective to deliver electrons to electron carrier(s) selected to be effective to deliver electrons to a redox enzyme, the redox enzyme is

selected to be effective to deliver the electrons to electron transfer mediator(s) selected to be effective to deliver electrons to the anode electrode, wherein the anode compartment further comprises the redox enzyme and the electron transfer mediator(s).

5

15. The fuel cell of claim 14, wherein (i) applies.

16. The fuel cell of claim 14, wherein (ii) applies.

10

17. The fuel cell of claim 14, wherein (iii) applies.

18. The fuel cell of claim 14, wherein (iv) applies.

15

19. The fuel cell of one of claims 13 to 18, wherein the proton transporting polypeptide is complex I.

20. The fuel cell of claim 19, comprising providing solution conditions in that anode compartment selected to reduce or eliminate NADH dehydrogenase activity in complex I.

20

21. The fuel cell of one of claims 13 to 18, wherein the barrier comprises a polypeptide integrated into a synthetic biocompatible membrane effective to transport protons from the anode compartment to the cathode compartment.

25

22. The fuel cell of claim 21, wherein the proton transporting polypeptide is complex I.

23. The fuel cell of one of claims 21 or 22, wherein the synthetic biocompatible membrane is cross-linked.

30

24. The fuel cell of claim 13, wherein the C<sub>1</sub> compound is methanol or an oxidative product thereof.

25. The fuel cell of claim 13, wherein the cathode electrode is effective to convey the electrons to hydrogen peroxide in the cathode compartment.

5

26. The fuel cell of claim 13, wherein the cathode electrode is effective to convey the electrons to oxygen in the cathode compartment.

27. The fuel cell of claim 13, wherein the cathode electrode is effective to  
10 convey the electrons to a solid oxidant in the cathode compartment.

28. A method of producing electrical power comprising:  
in an anode compartment, enzymatically reducing electron carrier(s) with  
electrons from a C<sub>1</sub> compound, the electron carrier(s) selected to operate  
15 with the dehydrogenase enzymes;  
enzymatically transferring the electrons from the electron carrier(s) to the redox  
enzyme;  
transferring the electrons from the redox enzyme to electron transfer mediator(s);  
transferring the electrons from the electron transfer mediator(s) to the anode  
20 electrode;  
transferring electrical current via an electrical conduit under an electrical load to a  
cathode electrode; and  
transferring the electrons from the cathode electrode to an electron acceptor  
composition.

25

29. A method of forming a biocompatible membrane that incorporates a  
polypeptide associated with the biocompatible membrane comprising:  
contacting an aperture with a mixture of polypeptide, membrane-forming  
amphiphile and an amount of a solvent miscible with water and  
30 biomembrane phase effective to decrease viscosity sufficiently to  
facilitate biocompatible membrane formation; and  
removing the solvent by evaporation.

30. A biocompatible membrane comprising a membrane-like barrier formed of triblock copolymer that comprises cross-linked polymer formed across an aperture with beveled edges.

5 31. The biocompatible membrane of claim 30, wherein the biocompatible membrane incorporates a membrane-associated polypeptide.

32. A method of preserving the function of a polypeptide in the presence of non-aqueous solvents comprising:  
10 forming a solution of block copolymers in a solvent comprising at least one non-aqueous solvent, and  
subsequently adding polypeptide to the solution.

33. The method of claim 32, further comprising forming a membrane from  
15 the solution.

34. The method of claim 33, further comprising forming a membrane via solvent evaporation.

20 35. The method of one of claims 32 to 34, wherein the polypeptide comprises a membrane associated or integral polypeptide.

36. The method of claim 35, wherein the polypeptide is complex I.

25 37. A fuel cell with an anode compartment and a cathode compartment comprising:

in the anode compartment, an anode electrode and one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound to an electron carrier, the anode compartment further  
30 comprising a liquid for supporting the dehydrogenase enzymes and adapted to maintain during operation of the fuel cell a pH of 8.0 or higher;

in the cathode compartment, hydrogen peroxide and a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment, the anode adapted to maintain during operation of the fuel cell a pH of 5.0 or lower; and a barrier separating the anode compartment from the cathode but effective to convey protons from the anode compartment to the cathode compartment.

- 10           38.   A fuel cell system comprising (1) a fuel cell with an anode compartment and a cathode compartment adapted to operate with a least one liquid consumable comprising (i) a liquid fuel composition or (ii) liquid electron acceptor composition, and:
- 15                   (2) one or both of (a) a fuel reservoir comprising liquid fuel composition separated from the anode compartment by a porous membrane that is selected to not be wetted by either the liquid fuel composition or a solvent/solution with which the anode chamber is adapted to operate or (b) a liquid fuel composition reservoir separated from the cathode compartment by a porous membrane that is selected to not be wetted by either the liquid fuel composition or a
- 20                   composition with which the cathode chamber is adapted to operate.

- 25           39.   The fuel cell system of claim 38, comprising multiple said fuel cells adapted to receive one or both of fuel and hydrogen peroxide from corresponding said reservoirs.

40.   The fuel cell system of claim 38, wherein the liquid fuel composition comprises C1 compound as fuel

- 30           41.   The fuel cell system of claim 38, wherein the liquid electron acceptor composition comprises hydrogen peroxide.

42.   A fuel cell system comprising

a fuel cell with an anode compartment and a cathode compartment and using one or both of (a) a liquid fuel composition or (b) a liquid electron acceptor composition, the fuel cell comprising:

- 5                   in the anode compartment, an anode electrode adapted to operate with a fuel;
- in the cathode compartment, a cathode electrode which, when a conductive pathway to the anode electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and
- 10                  a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment; and
- one or both of (a) a fuel reservoir comprising a liquid fuel composition separated from the anode compartment by a porous membrane that is selected to not be wetted
- 15                  by either the liquid fuel composition or a solvent/solution with which the anode chamber is adapted to operate or (b) a liquid electron acceptor composition reservoir separated from the anode compartment by a porous membrane that is selected to not be wetted by either the liquid electron acceptor composition of the reservoir or a composition with which the cathode chamber is adapted to operate.

20

43.     The fuel cell system of claim 42, wherein the fuel cell has a said reservoir for fuel.
44.     The fuel cell system of claim 43, wherein the fuel is C<sub>1</sub> compound or
- 25     precursor.
45.     The fuel cell system of claim 44, wherein the fuel cell has a said reservoir for the C<sub>1</sub> compound.
- 30     46.     The fuel cell system of claim 45, wherein the C<sub>1</sub> compound is methanol.
47.     The fuel cell system of claim 45, wherein the solution in the fuel reservoir consists essentially of methanol and water.

48. The fuel cell system of claim 47, wherein the solution in the fuel reservoir comprises an amount of water adapted to substantially replace the water consumed in operating the fuel cell.

5

49. The fuel cell system of claim 42, comprising multiple said fuel cells adapted to receive one or both of fuel and liquid electron acceptor from corresponding said reservoirs.

10

50. The fuel cell system of one of claims 42 or 49, wherein the reservoir of (a) or (b) is formed by two layers polymer, at least one of which is said porous membrane, welded together to provide conduits between the layers for the liquid fuel composition or liquid electron acceptor composition.

15

51. The fuel cell system of claim 50, wherein the two layer structure further comprises conduits for removing CO<sub>2</sub>.

20

52. The fuel cell system of claim 51, further comprising a CO<sub>2</sub> absorbent positioned to collect CO<sub>2</sub> from said CO<sub>2</sub> removing conduits.

53. The fuel cell system of claim 42, wherein the fuel cell has a said reservoir for liquid electron acceptor composition.

54. The fuel cell system of claim 53, wherein the liquid electron acceptor is a hydrogen peroxide composition.

55. A method of operating a fuel cell comprising:  
consuming (i) a fuel molecule or (ii) an electron acceptor molecule during  
operation of the fuel cell; and  
transporting (i) fuel molecule or (ii) electron acceptor molecule via the  
vapor phase to a chamber in which the respective fuel molecule or  
electron acceptor molecule is consumed.

30



56. The method of claim 55, wherein the fuel molecule is  $C_1$  compound or precursor.

57. The method of claim 55, wherein the electron acceptor molecule is  
5 hydrogen peroxide.

58. A fuel cell system comprising  
a fuel cell with an anode compartment and a cathode compartment, the fuel cell  
comprising:

10 in the anode compartment, an anode electrode, wherein the anode  
compartment is adapted to generate  $CO_2$ ;  
in the cathode compartment, a cathode electrode which, when a  
conductive pathway to the first electrode is formed, is effective to  
convey the electrons to an electron acceptor composition in the  
15 cathode compartment; and  
a barrier separating the anode compartment from the cathode  
compartment but effective to convey protons from the anode  
compartment to the cathode compartment; and  
a  $CO_2$  permeable membrane or porous material adapted to allow  $CO_2$  to exit the anode  
20 compartment.

59. The fuel cell system of claim 58, further comprising:  
a reservoir for  $C_1$  compound or precursor separated from the anode  
compartment by one or more channels.

25

60. The fuel cell system of claim 59, wherein the one or more channels have  
check valves preventing flow from the anode compartment into the reservoir.

61. The fuel cell system of claim 58, comprising multiple said fuel cells  
30 adapted to exhaust  $CO_2$  through said  $CO_2$  permeable membrane.

62. The fuel cell system of one of claims 58 or 61, further comprising:  
a  $CO_2$  collecting manifold; and

- 56 -

a pump for removing CO<sub>2</sub> from the manifold.

63. The fuel cell system of one of claims 58 or 61, further comprising:  
a CO<sub>2</sub> collecting manifold; and  
CO<sub>2</sub> absorbent positioned to collect CO<sub>2</sub> from manifold.
64. A method of operating a fuel cell comprising:  
consuming in an anode compartment a fuel to generate CO<sub>2</sub> during  
operation of the fuel cell;  
removing CO<sub>2</sub> derived from the C<sub>1</sub> compound from the anode  
compartment; and  
replacing liquid volume in the anode compartment consumed by operation  
of the fuel cell and CO<sub>2</sub> removal with replacement fuel.
65. A device for metering a reactant concentrate comprising:  
a first chamber adapted for containing reactant concentrate;  
a second chamber adapted for receiving reactant concentrate from the first  
chamber; and  
a membrane separating the first and second chambers comprising pores  
traversing from a first chamber side of the membrane to a second  
chamber side of the membrane, and internal conduit in the  
membrane effective to deliver gas to the pores.
66. A fuel cell comprising an anode chamber and a cathode chamber, the fuel  
cell adapted for used with a fuel composition and an anode chamber composition, the  
fuel cell further comprising the device of claim 65 for metering fuel, wherein the anode  
chamber is the second chamber, and wherein the material of the membrane is selected to  
resist wetting by the fuel composition and the anode chamber composition, thereby  
creating a force that acts to draw gas to the pores via the internal conduit.
67. A fuel cell system comprising (1) multiple fuel cells with an anode  
chamber and a cathode chamber, the fuel cell adapted for used with a fuel composition  
and an anode chamber composition, and (2) the device of claim 65 for metering fuel into

to anode chambers of multiple said fuel cells, wherein the anode chambers are the second chamber, and wherein the material of the membrane is selected to resist wetting by the fuel composition and the anode chamber composition, thereby creating a force that acts to draw gas to the pores via the internal conduit.

5

68. A fuel cell adapted for use with an anode composition, the fuel cell comprising:

an anode/cathode barrier that selectively transmits protons;

an anode chamber comprising a grid of porous material selected to not be wetted

10

by the anode composition and to transmit CO<sub>2</sub>; and

a manifold connected to the grid to collect CO<sub>2</sub> transmitted through the grid.

69. The fuel cell of claim 68, further comprising:

a pump for reducing the pressure in the manifold.

15

70. The fuel cell of claim 68, further comprising:

an anode electrode formed by a porous coating of conductor on the grid.

20

71. A fuel cell with an anode compartment and a cathode compartment comprising:

in the anode compartment, an anode electrode and, integrated into

biocompatible membrane tethered to the anode electrode, a redox enzyme that can receive electrons from an electron carrier;

in the cathode compartment, a cathode electrode which, when a

25

conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and

a barrier separating the anode compartment from the cathode

compartment but effective to convey protons from the anode

30

compartment to the cathode compartment.

72. The fuel cell of claim 1, further comprising:

in the anode compartment, one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound to an electron carrier.

73. The fuel cell of claim 72, wherein the C<sub>1</sub> compound is methanol or an  
5 oxidative product thereof.

74. The fuel cell of claim 72, wherein the barrier comprises proton pumping polypeptide which can be a redox enzyme.

10 75. The fuel cell of claim 72, wherein the cathode electrode is effective to convey the electrons to hydrogen peroxide in the cathode compartment.

76. The fuel cell of claim 72, wherein the barrier incorporates a proton transporting moiety for transporting protons from the anode compartment to the cathode  
15 compartment.

77. The fuel cell of claim 1, wherein said tethered biocompatible membranes are across perforations in a substrate forming a part of the barrier, and the biocompatible membranes across the perforations comprises proton pumping polypeptide which can be  
20 the redox enzyme.

78. The fuel cell of claim 77, wherein the width of the perforations is from 10 micrometer to 1,000 micrometer.

25 79. The fuel cell of claim 77, wherein the width of the perforations is from 20 to 200 micrometer.

80. The fuel cell of claim 77, wherein the width of the perforations is from 60 to 140 micrometer  
30

81. A fuel cell with an anode compartment and a cathode compartment comprising:

in the anode compartment, an anode electrode and, associated with or adjacent to the anode electrode, a redox enzyme incorporated into a synthetic membrane comprising a block copolymer, wherein the redox enzyme can receive electrons from an electron carrier;

5 in the cathode compartment, a cathode electrode which, when a conductive pathway to the first electrode is formed, is effective to convey the electrons to an electron acceptor composition in the cathode compartment; and

a barrier separating the anode compartment from the cathode

10 compartment but effective to convey protons from the anode compartment to the cathode compartment.

82. The fuel cell of claim 81, further comprising:

in the anode compartment, one or more dehydrogenase enzymes effective

15 to transfer electrons from a C<sub>1</sub> compound to an electron carrier.

83. The fuel cell of claim 82, wherein the C<sub>1</sub> compound is methanol or an oxidative product thereof.

20 84. The fuel cell of claim 82, wherein the barrier comprises proton pumping polypeptide which can be the redox enzyme.

85. The fuel cell of claim 82, wherein the cathode electrode is effective to convey the electrons to hydrogen peroxide in the cathode compartment.

25

86. The fuel cell of claim 82, wherein the barrier incorporates a proton transporting moiety for transporting protons from the anode compartment to the cathode compartment.

30 87. The fuel cell of claim 81, wherein said synthetic membranes are across perforations in a substrate forming a part of the barrier, and the synthetic membranes across the perforations comprises proton pumping polypeptide which can be the redox enzyme.

88. The fuel cell of claim 87, wherein the width of the perforations is from 10 micrometer to 1,000 micrometer.

5 89. The fuel cell of claim 87, wherein the width of the perforations is from 20 to 200 micrometer.

90. The fuel cell of claim 87, wherein the width of the perforations is from 60 to 140 micrometer.

10

91. The fuel cell of claim 81, wherein said synthetic membranes are across perforations in a substrate forming a part of the barrier, which substrate is formed of polyimide polymer or perfluorinated polymer.

15 92. A fuel cell with an anode compartment, a cathode compartment and a barrier separating the anode compartment from the cathode compartment but effective to convey protons from the anode compartment to the cathode compartment, comprising in the anode compartment, one or more anode electrodes and, one or more dehydrogenase enzymes effective to transfer electrons from a C1 compound to electron carrier(s),  
20 wherein one or more of the said enzyme(s) are covalently linked to surface(s) within the anode compartment.

93. The fuel cell of claim 92, wherein the C<sub>1</sub> compound is methanol or an oxidative product thereof..

25

94. The fuel cell of claim 92, wherein the barrier comprises proton pumping polypeptide which can be a redox enzyme that can receive electrons from the electron carrier(s).

30 95. The fuel cell of claim 92, wherein the cathode electrode is effective to convey the electrons to hydrogen peroxide in the cathode compartment.

96. A fuel cell with an anode compartment and a cathode compartment adapted to operate with a hydrogen peroxide as electron acceptor molecule, the fuel cell comprising:

- 5 a first barrier separating the anode compartment and the cathode compartment, but effective to transport protons from the anode compartment to the cathode compartment; and
- 10 a second barrier separating the anode compartment and the cathode compartment, which is more proximate to the cathode compartment than the first, wherein the second barrier is a biocompatible membrane or a proton-conductive polymeric membrane, the second barrier fitted to limit the diffusion of hydrogen peroxide to the first barrier.




97. The fuel cell of claim 96, wherein the second barrier is a biocompatible membrane.

15

98. The fuel cell of claim 96, wherein the second barrier is a proton-conductive polymeric membrane.

99. The fuel cell of claim 96, wherein the first barrier is a biocompatible  
20 membrane comprising a proton pumping polypeptide effective to transport protons from the anode compartment to the cathode compartment.

100. The fuel cell of claim 96, further comprising a peroxide scavenger loaded between the first and second membranes, or incorporated into the second membrane.

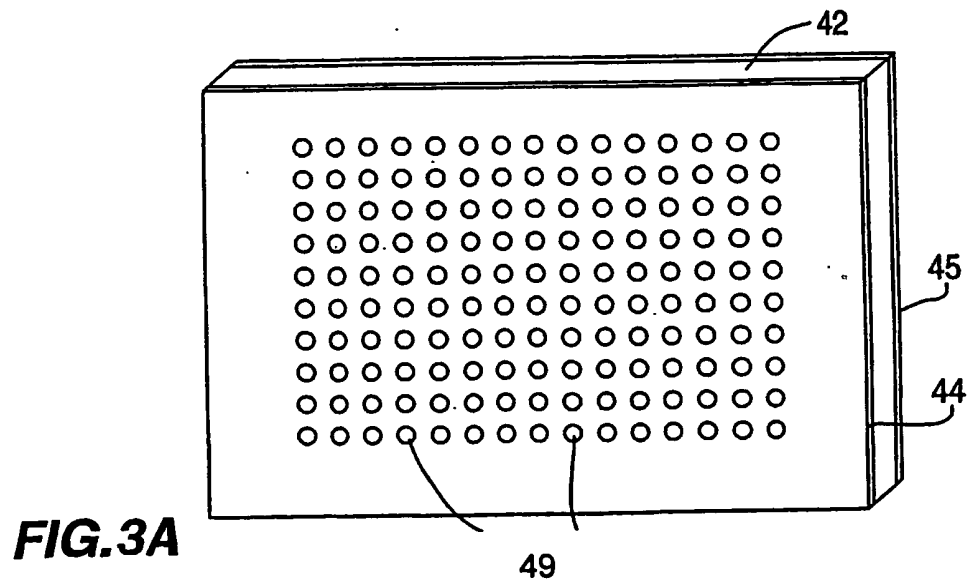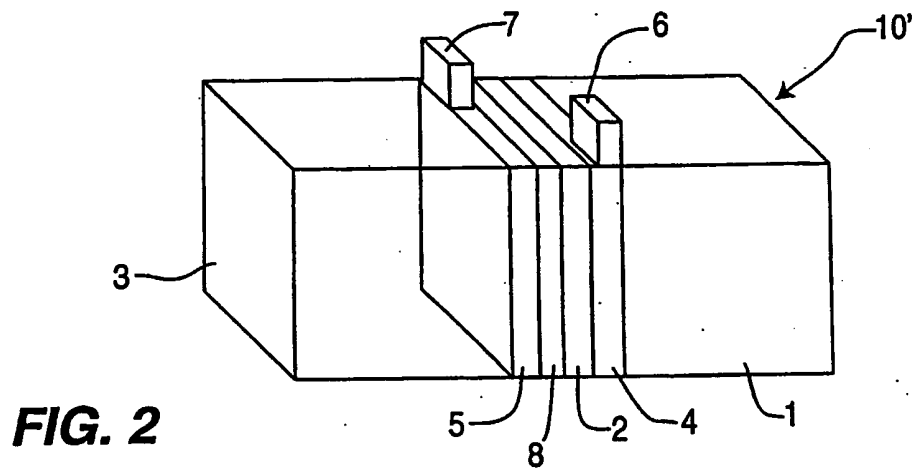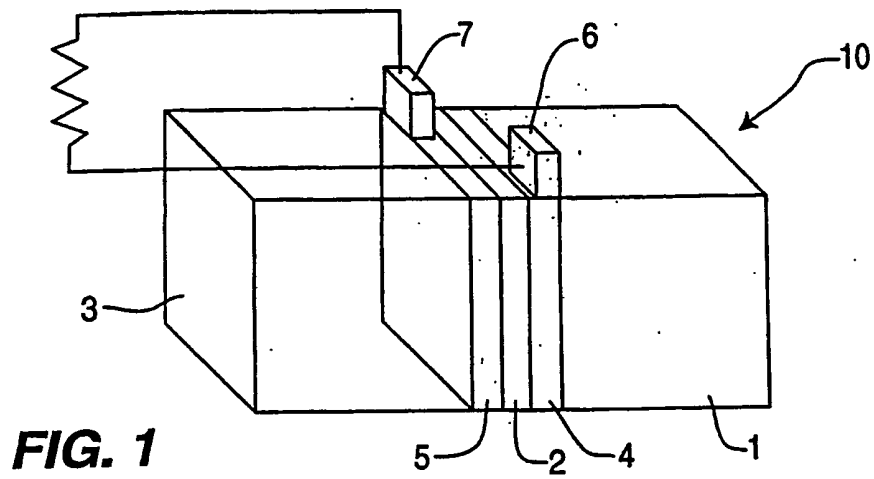



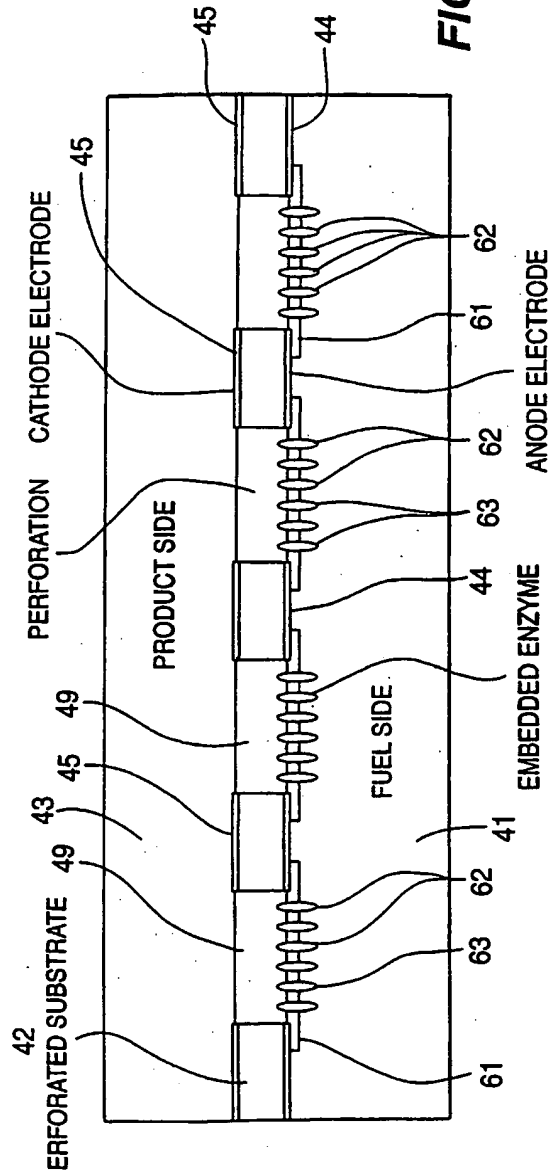


FIG. 3B

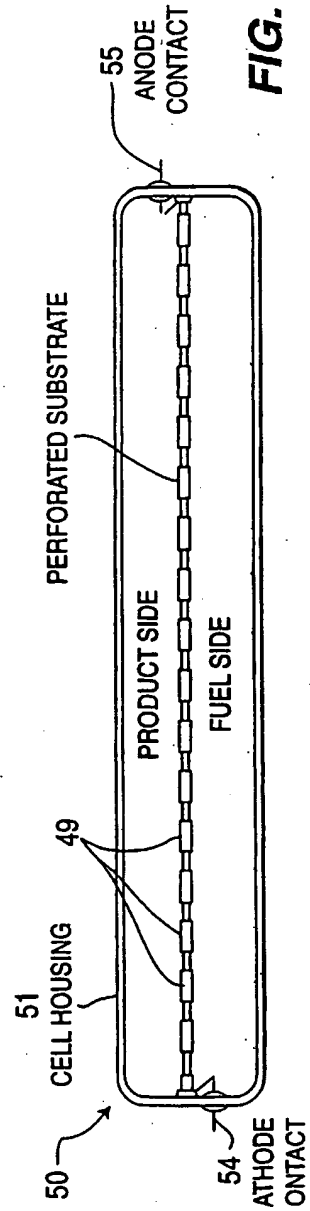


FIG. 3C

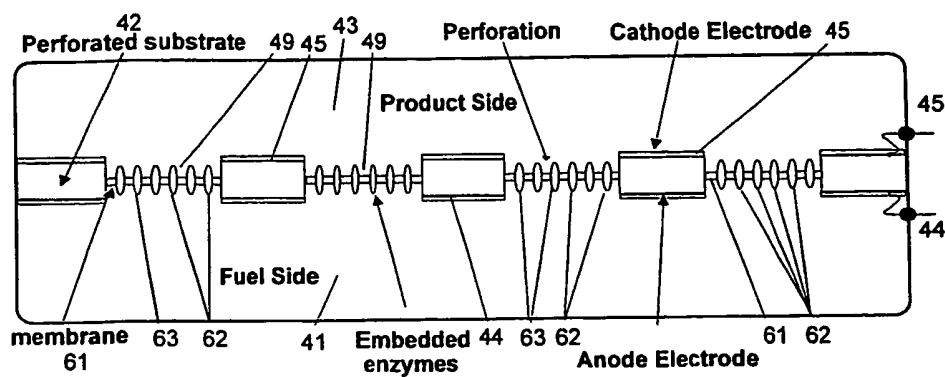


Fig. 3D


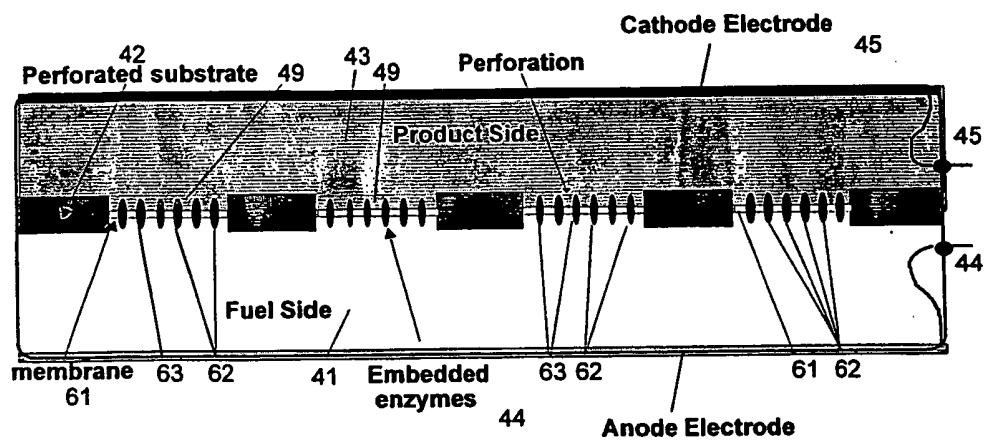


Fig. 3E

20

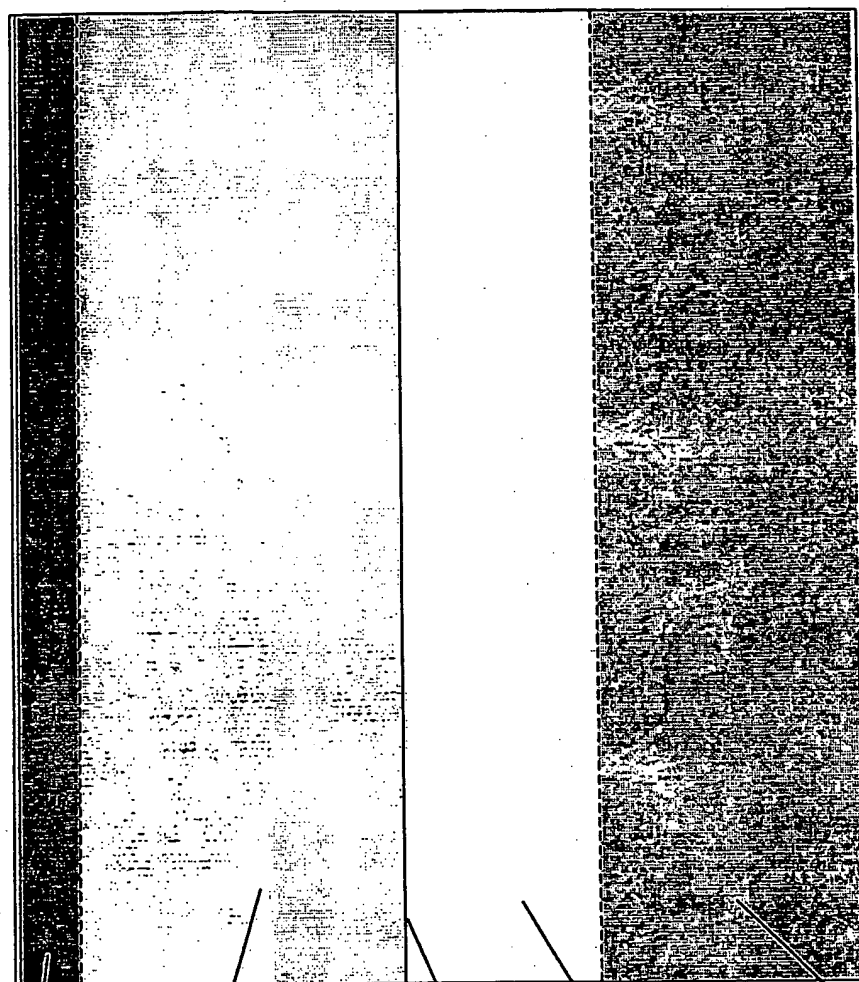

18

11

14/12/15

13

19

**Figure 4**

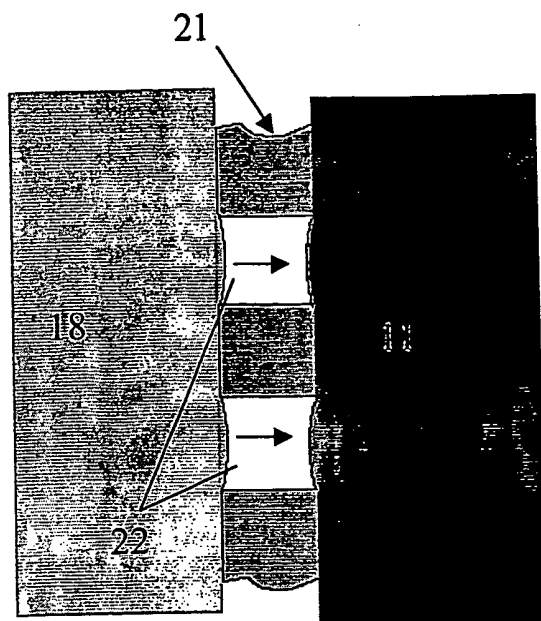


Figure 5A

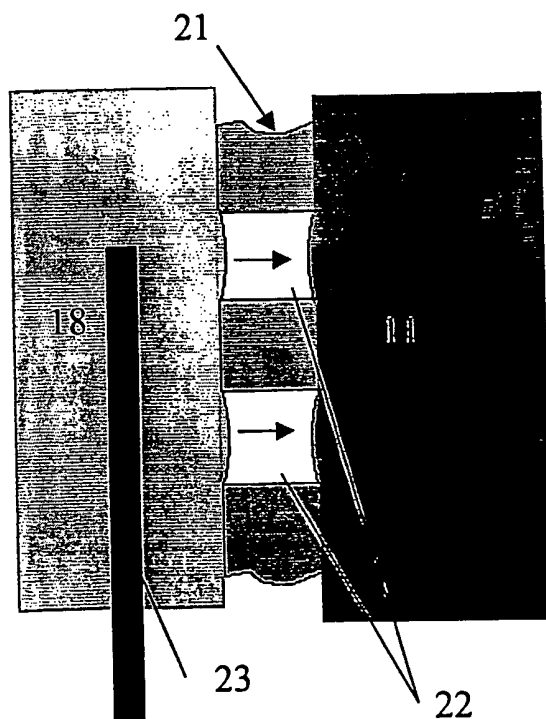
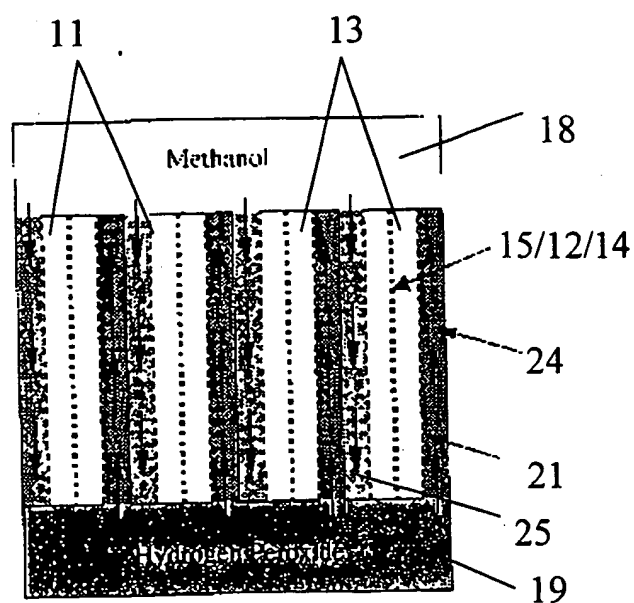
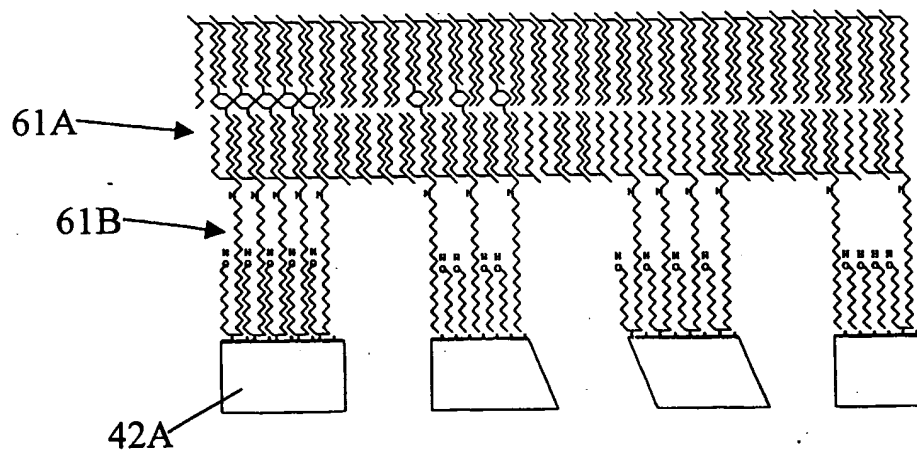


Figure 5B

6/18

**Figure 6****Figure 7A**

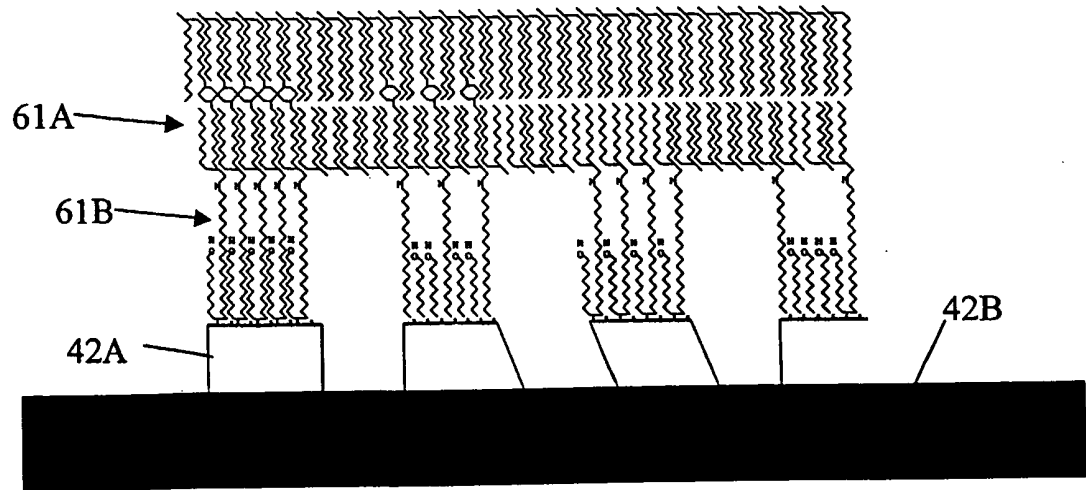


Figure 7B


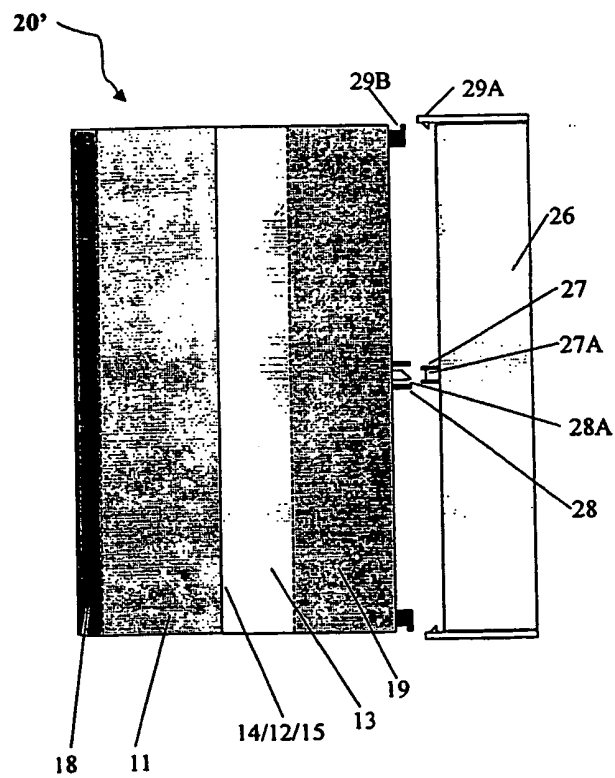


Figure 8A

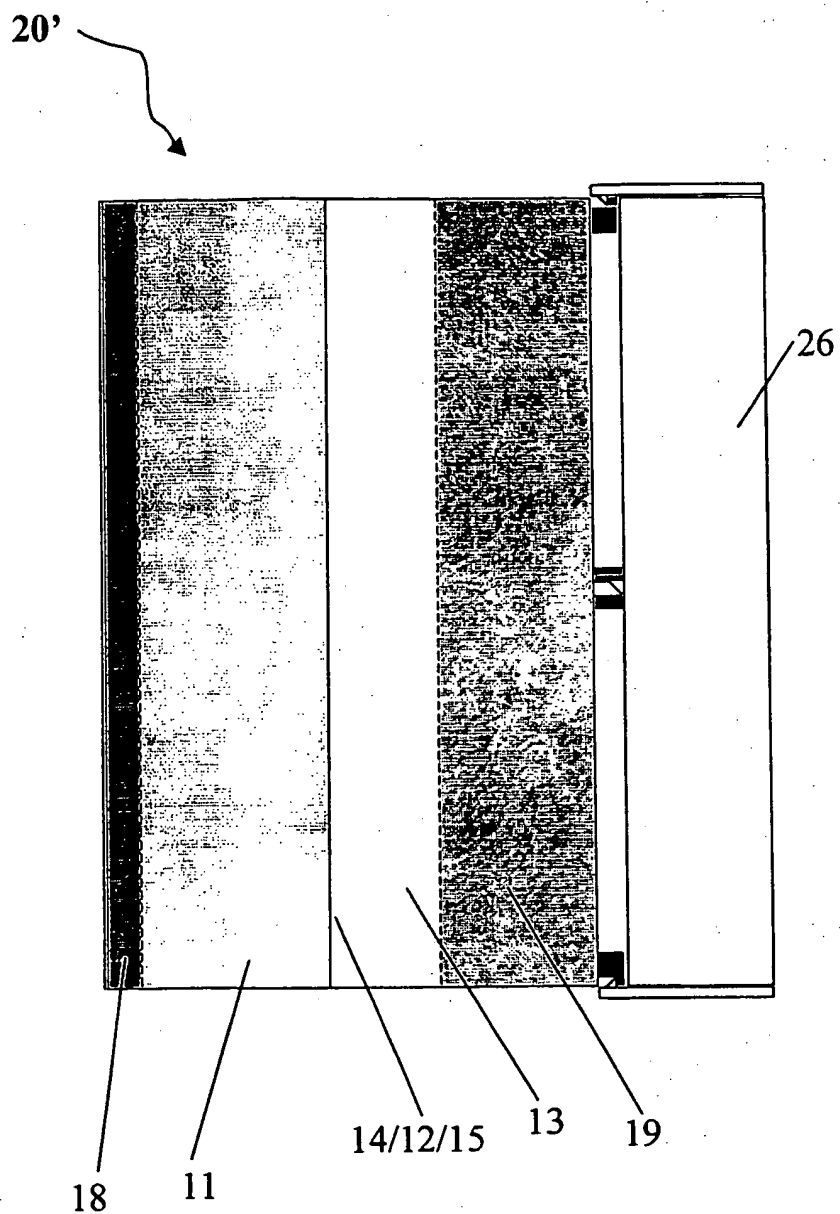

**Figure 8B**

9/18


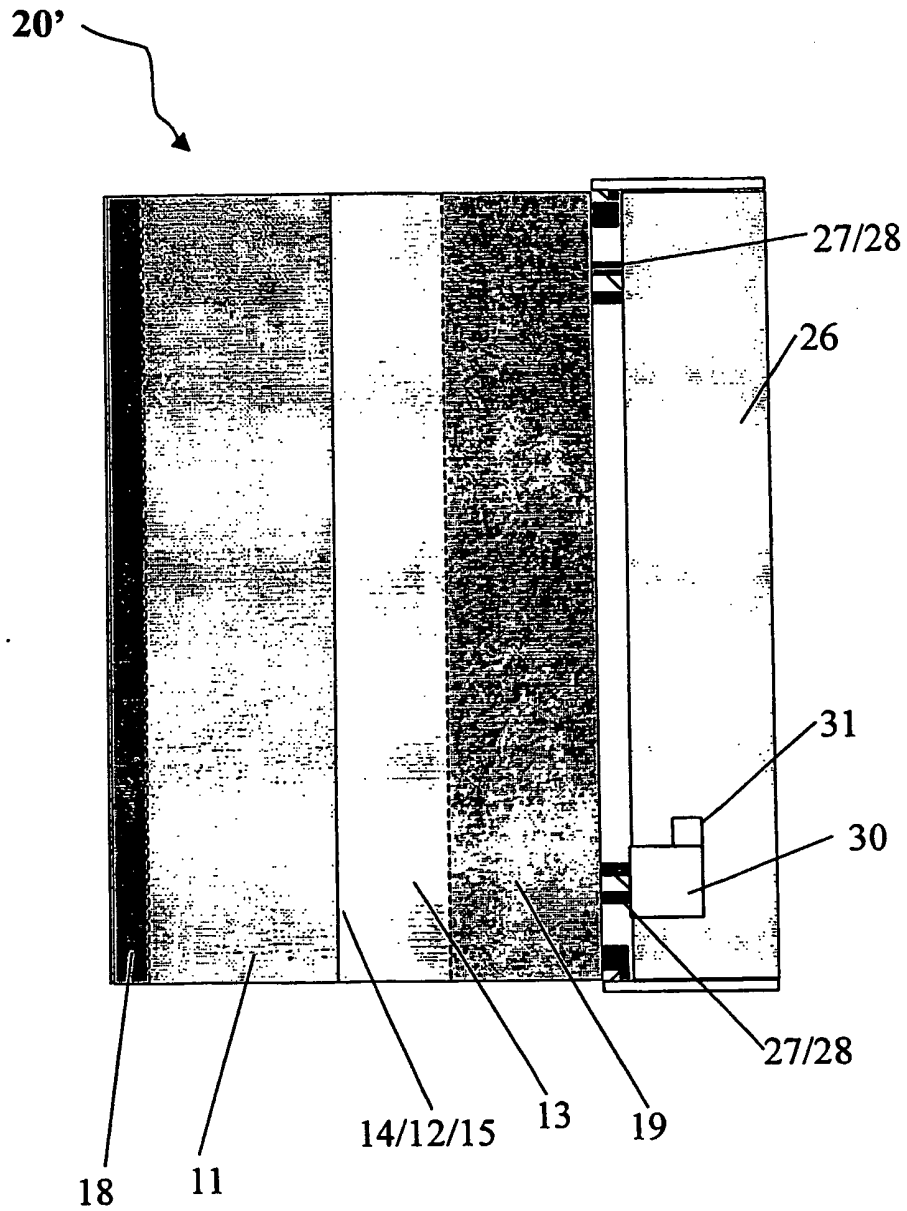



Figure 8C

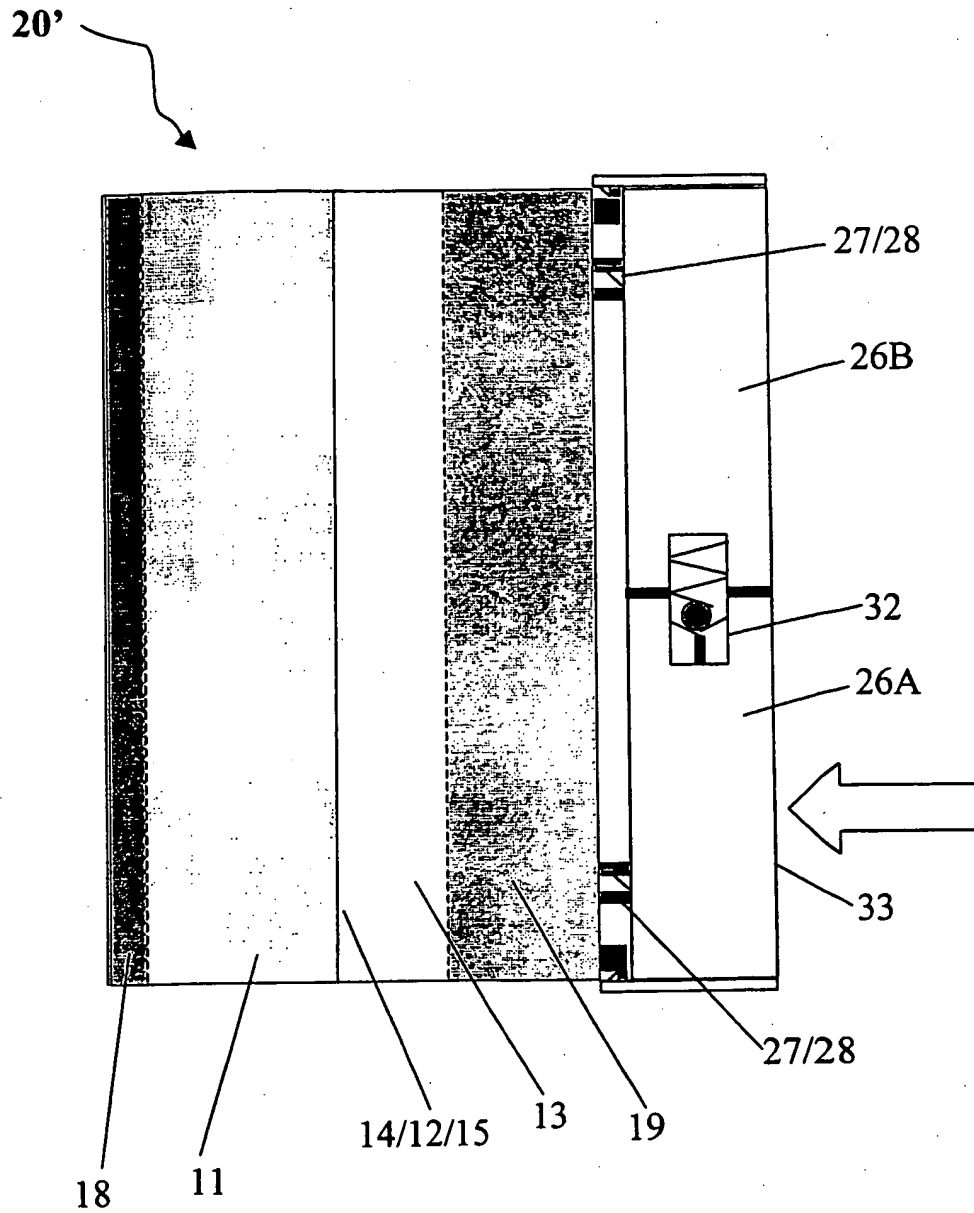

10/18


**Figure 8D**

11/18

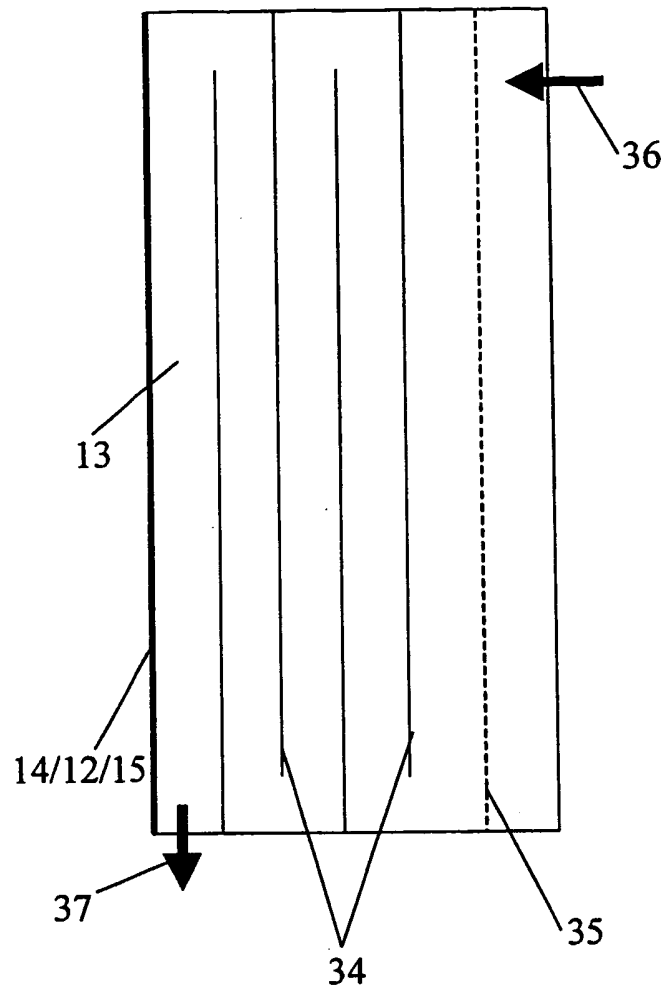

**Figure 9**

12/18

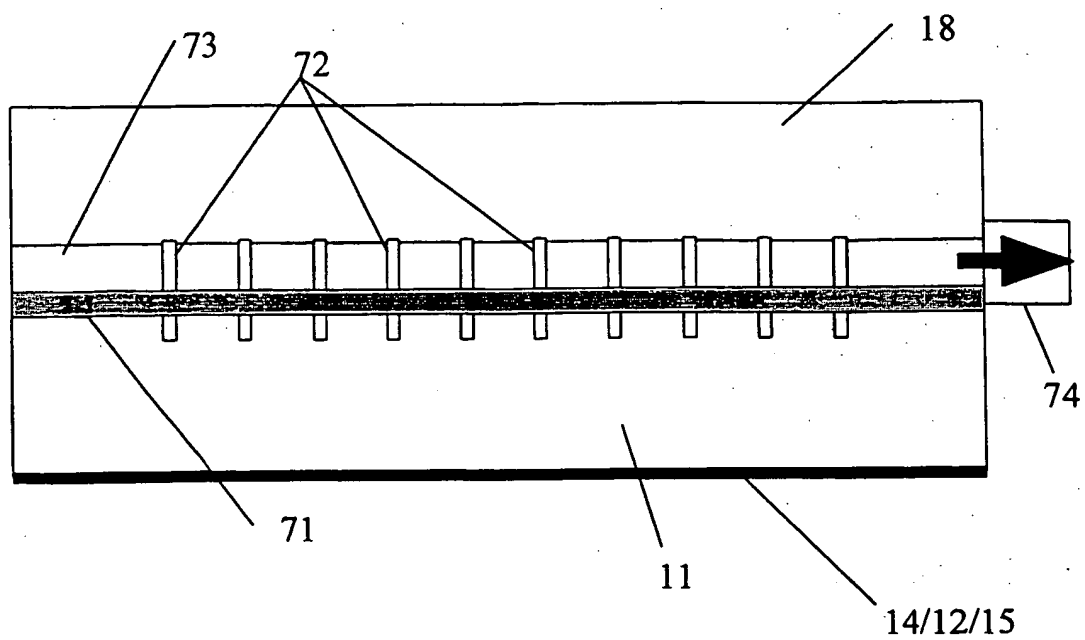

**Figure 10**

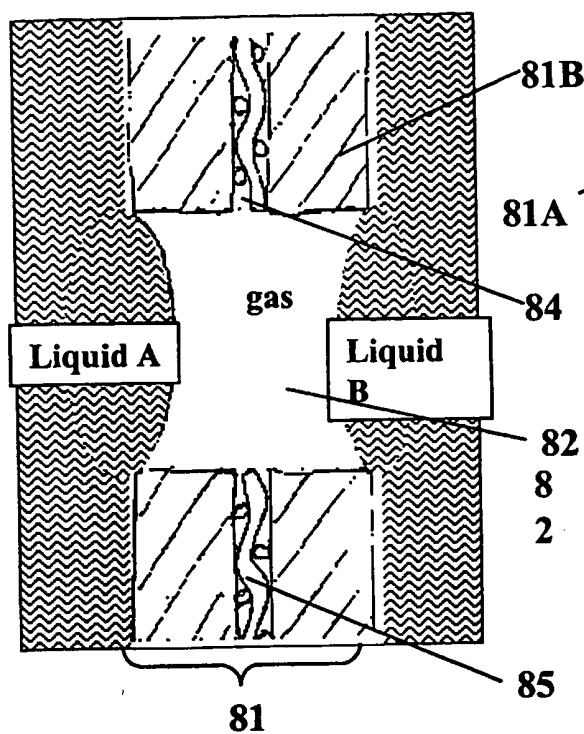


Fig. 11A

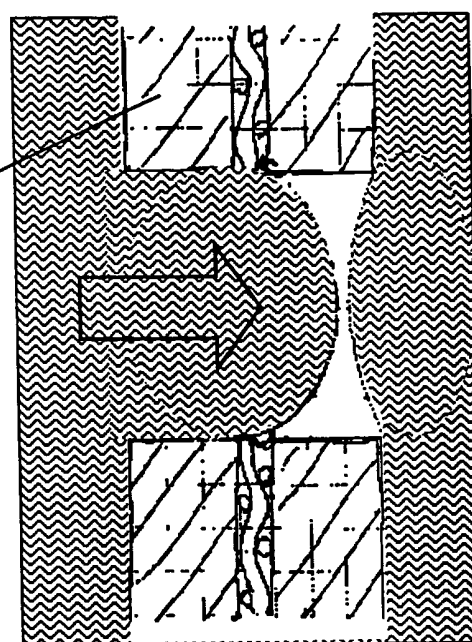


Fig. 11B

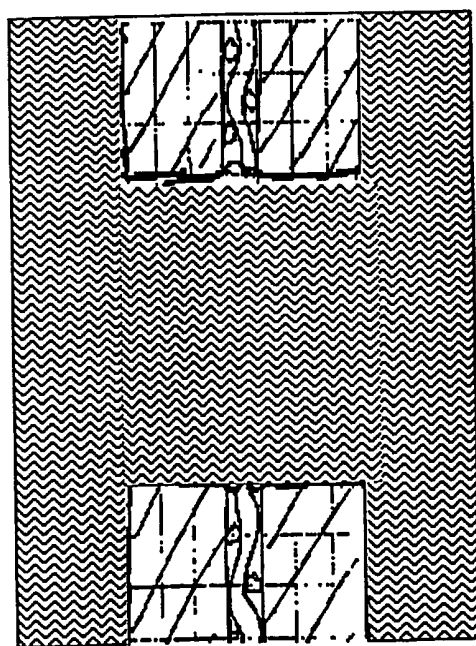


Fig. 11C

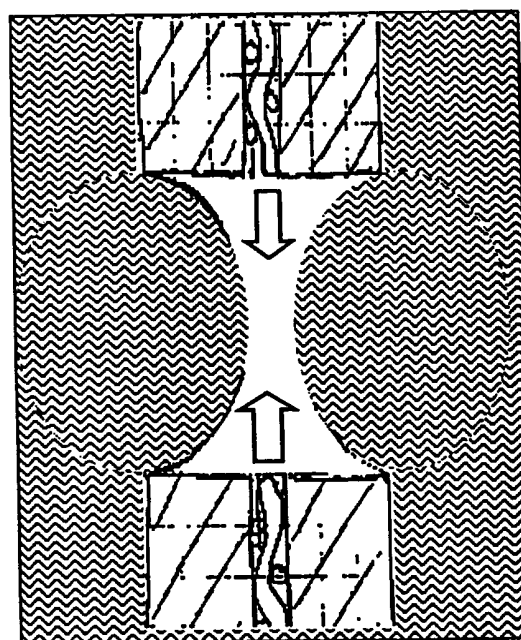


Fig. 11D

14/18

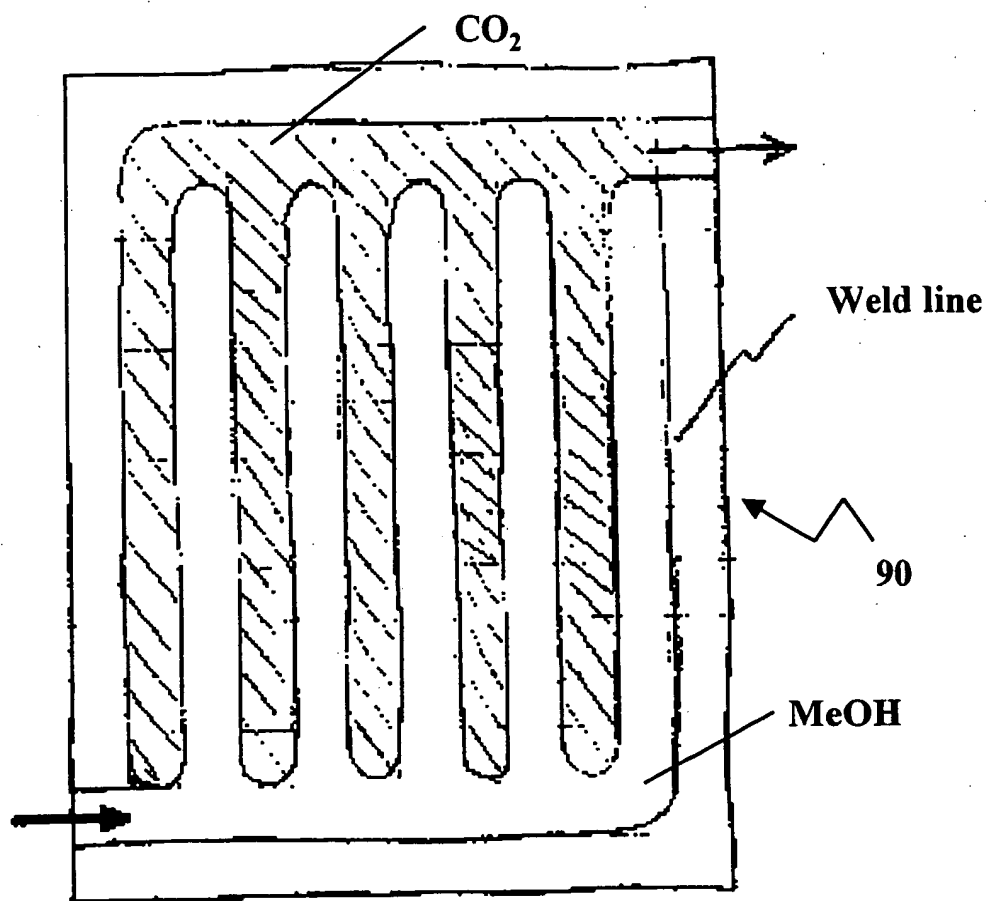


Fig. 12B

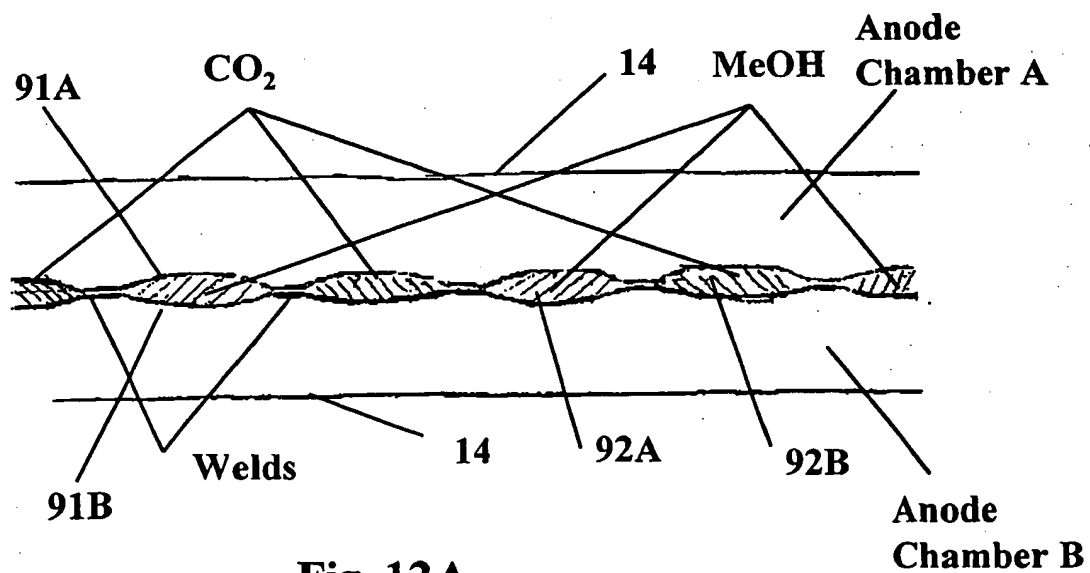


Fig. 12A

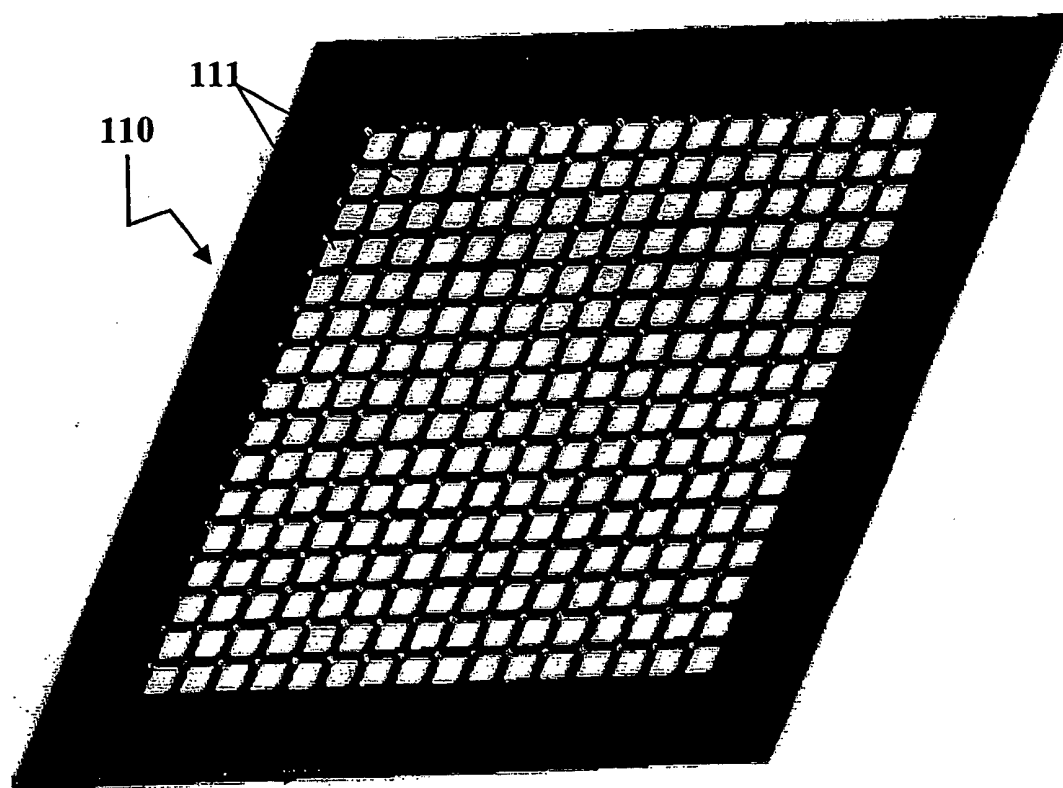


Fig. 13A

16/18

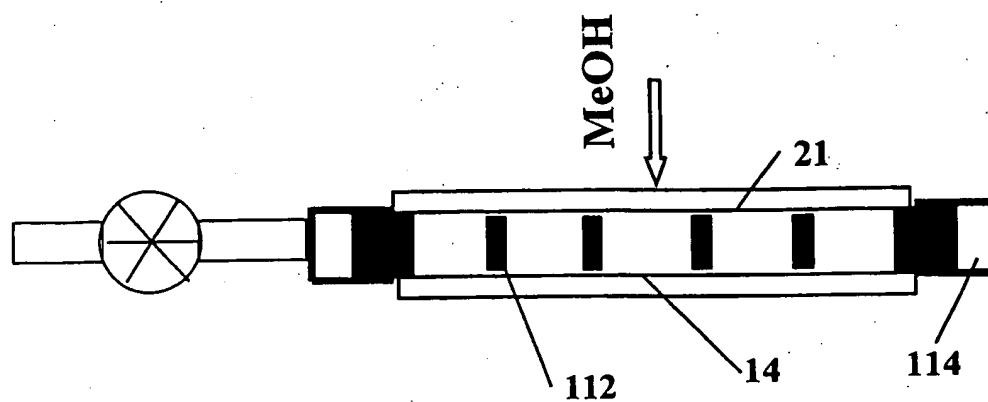


Fig. 13C



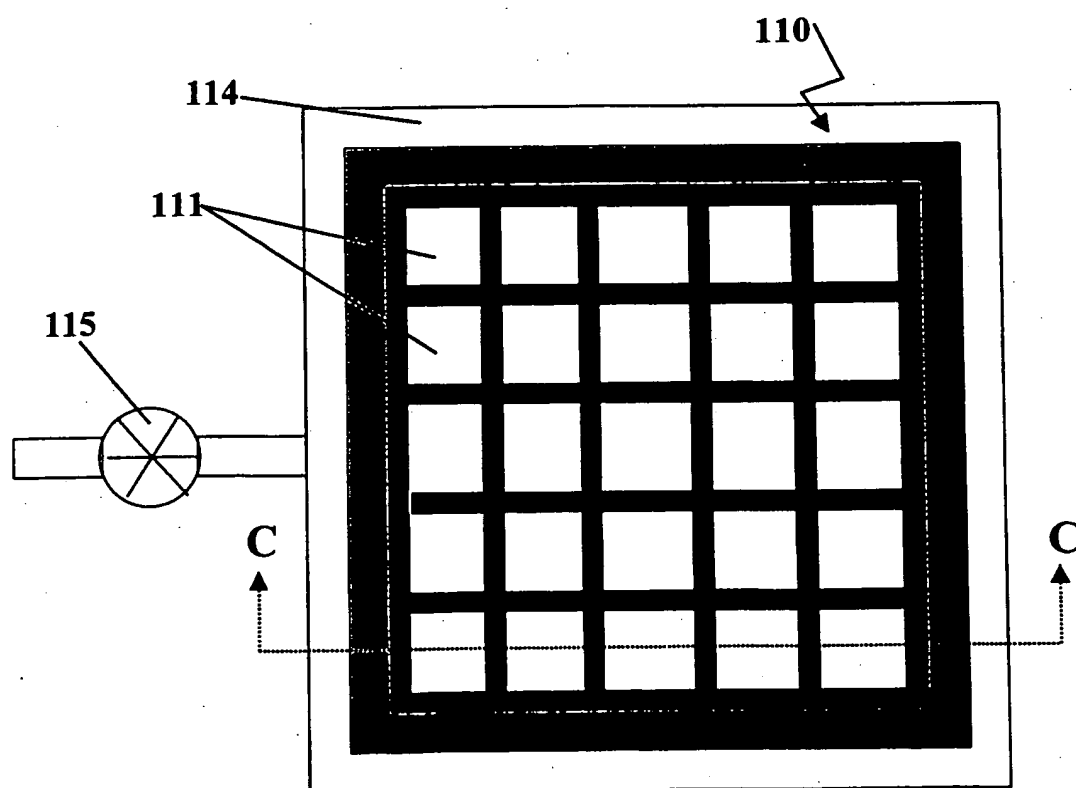



Fig. 13B

17/18

**Fig. 13D****Fig. 13E**

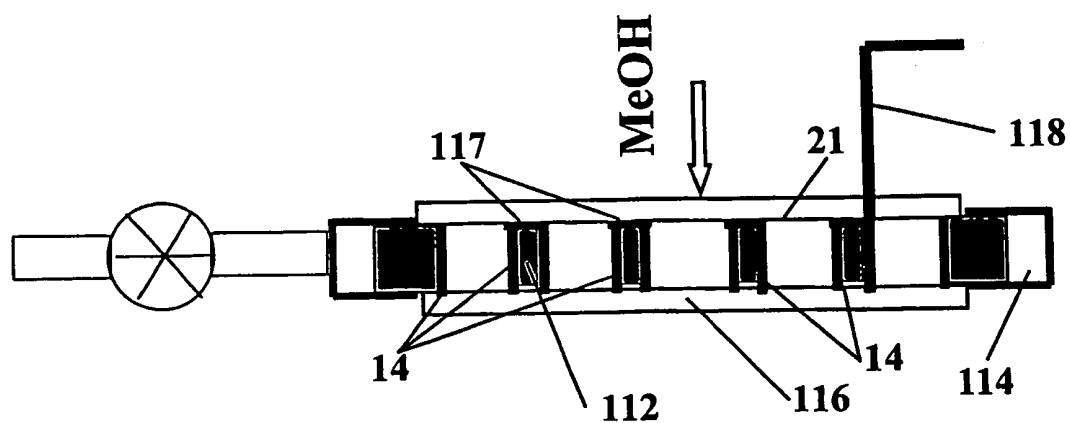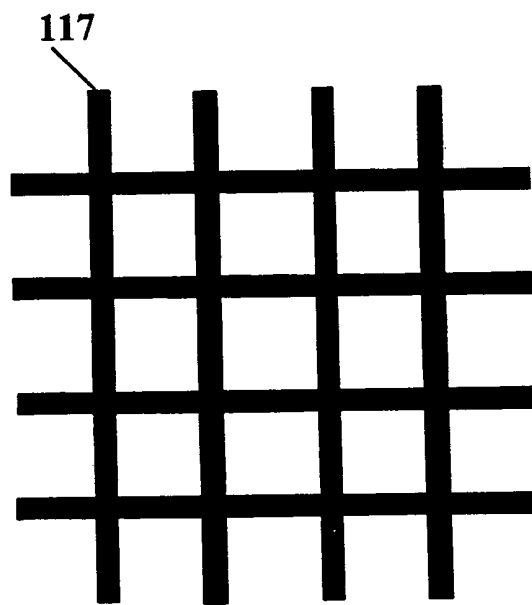

18/18

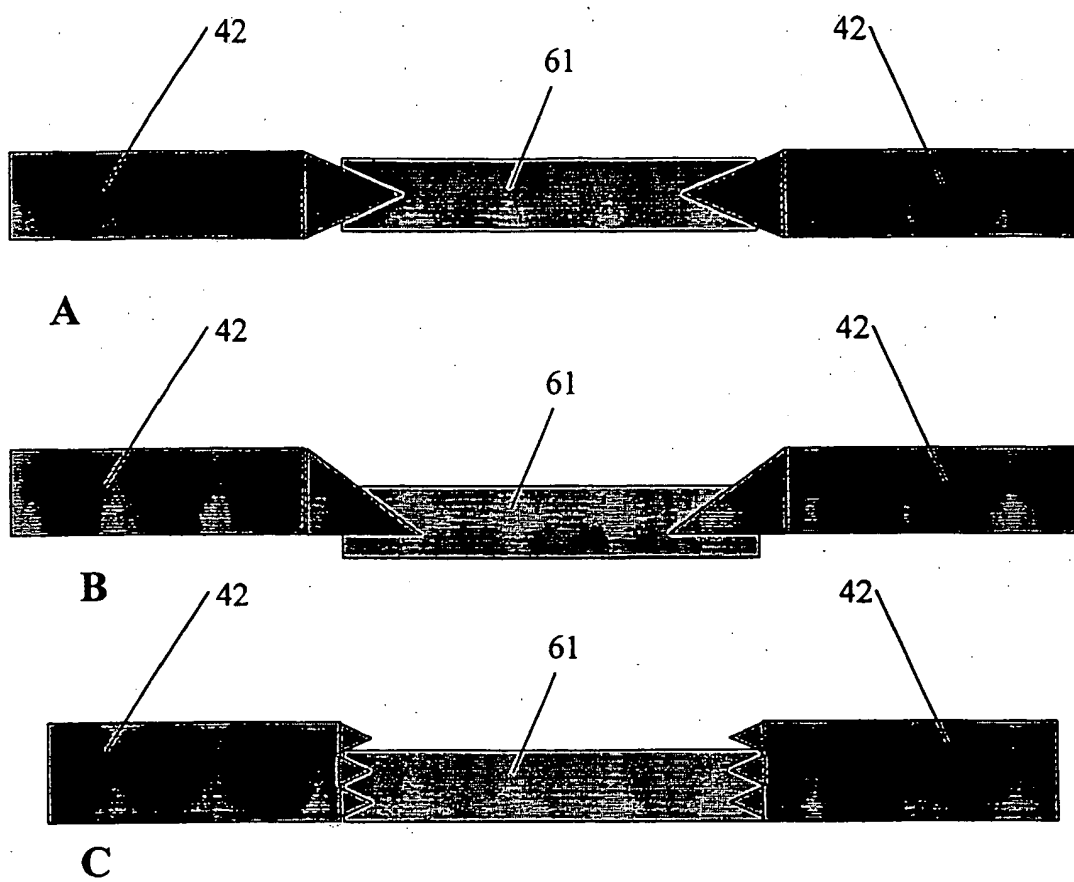**Fig. 14**

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/11719

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H01M 8/04

US CL : 429/ 12, 13, 40; 204/ 197, 412, 403, 400

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
U.S. : 429/ 12, 13, 40; 204/ 197, 412, 403, 400

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
east

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,126,034A (CARTER et al) 30 June 1992 (30.06.1992), column 1, lines 45-65.	1-100
Y	US 5,736,026A (PATEL et al) 7 April 1998 (07.04.1998), column 1, lines 35-65.	1-100

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "A" document member of the same patent family

Date of the actual completion of the international search

09 August 2002 (09.08.2002)

Date of mailing of the international search report

06 SEP 2002

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Patrick Ryan

Telephone No. 703-308-0661

Form PCT/ISA/210 (second sheet) (July 1998)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ ~~FADED~~ TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**